



规格书

Client appo

A





Description 描述

白光LED由蓝光芯片与荧光粉激发而成

Package Dimensions 封装尺寸

备注

所有标注尺寸单位为毫米





Selection Guide

Electrical / Optical Characteristics at Ta=25Ta






BIN	IV	Im
38b		
39a		
39b		
40a		
40b		
41a		
41b		
42a		
42b		
43a		

BIN	VF	V
B		
C		
D		
E		
F		
G		
H		
I		

BIN	WL
D5	
D4	
D3	






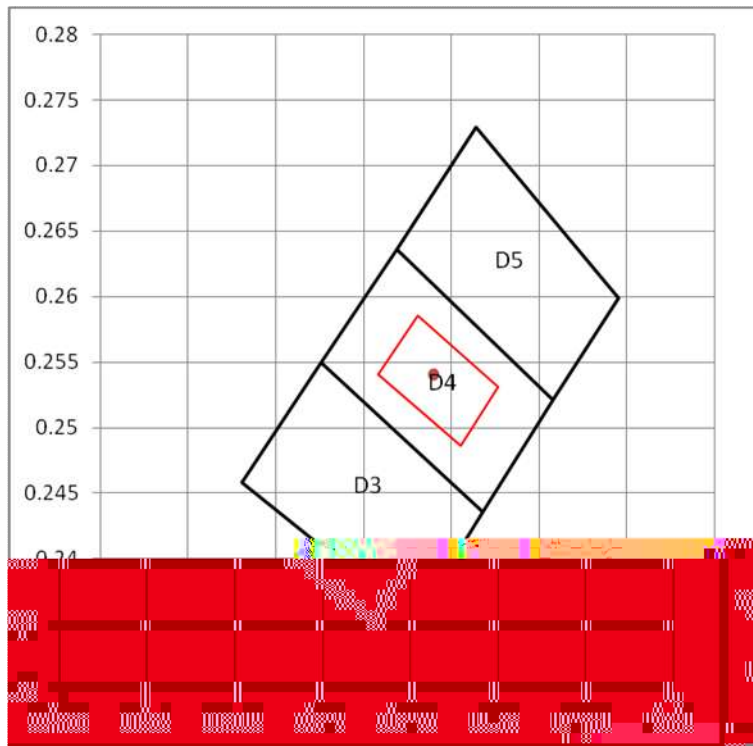



GROUP	Left down		Left up		Right up		Right down	
D5	0.2719	0.2636	0.2764	0.2729	0.2845	0.2599	0.2808	0.2521
D4	0.2676	0.2550	0.2719	0.2636	0.2808	0.2521	0.2768	0.2436
D3	0.2631	0.2458	0.2676	0.2550	0.2768	0.2436	0.2729	0.2352






Typical optical characteristics curves

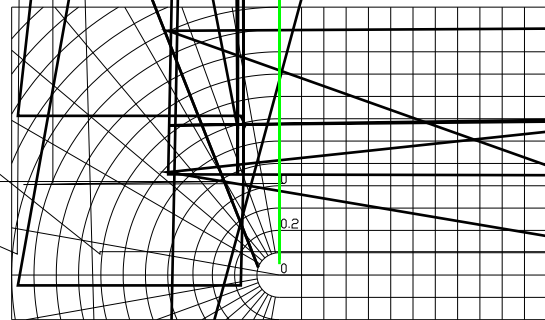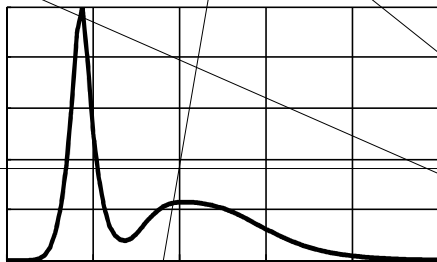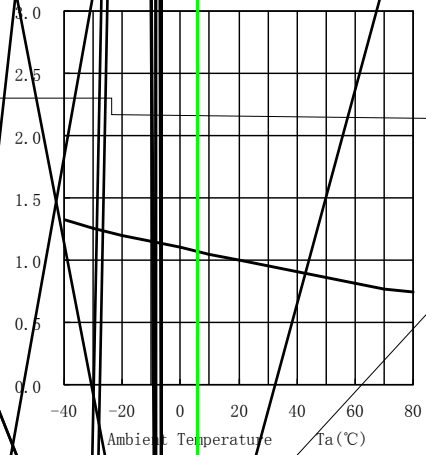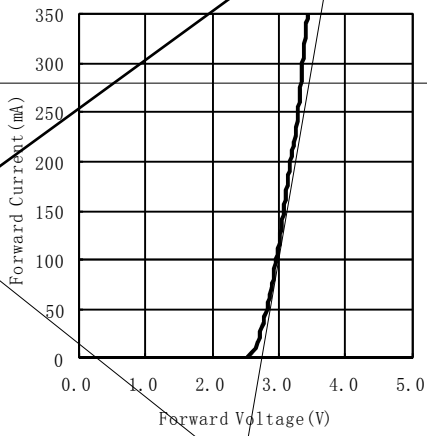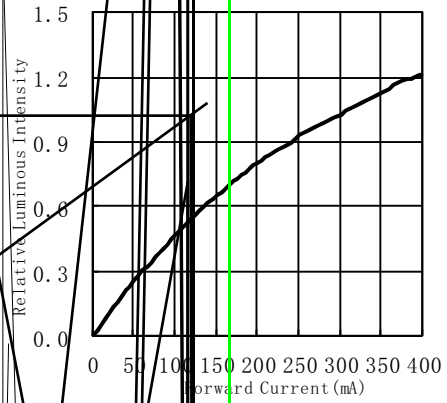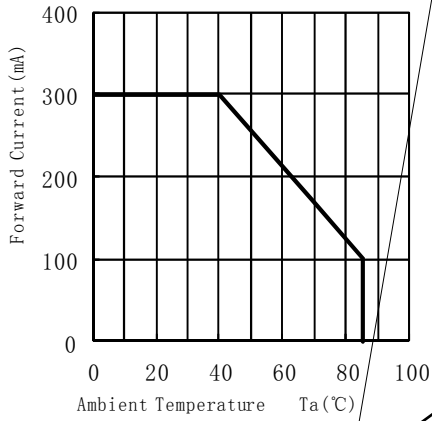




/



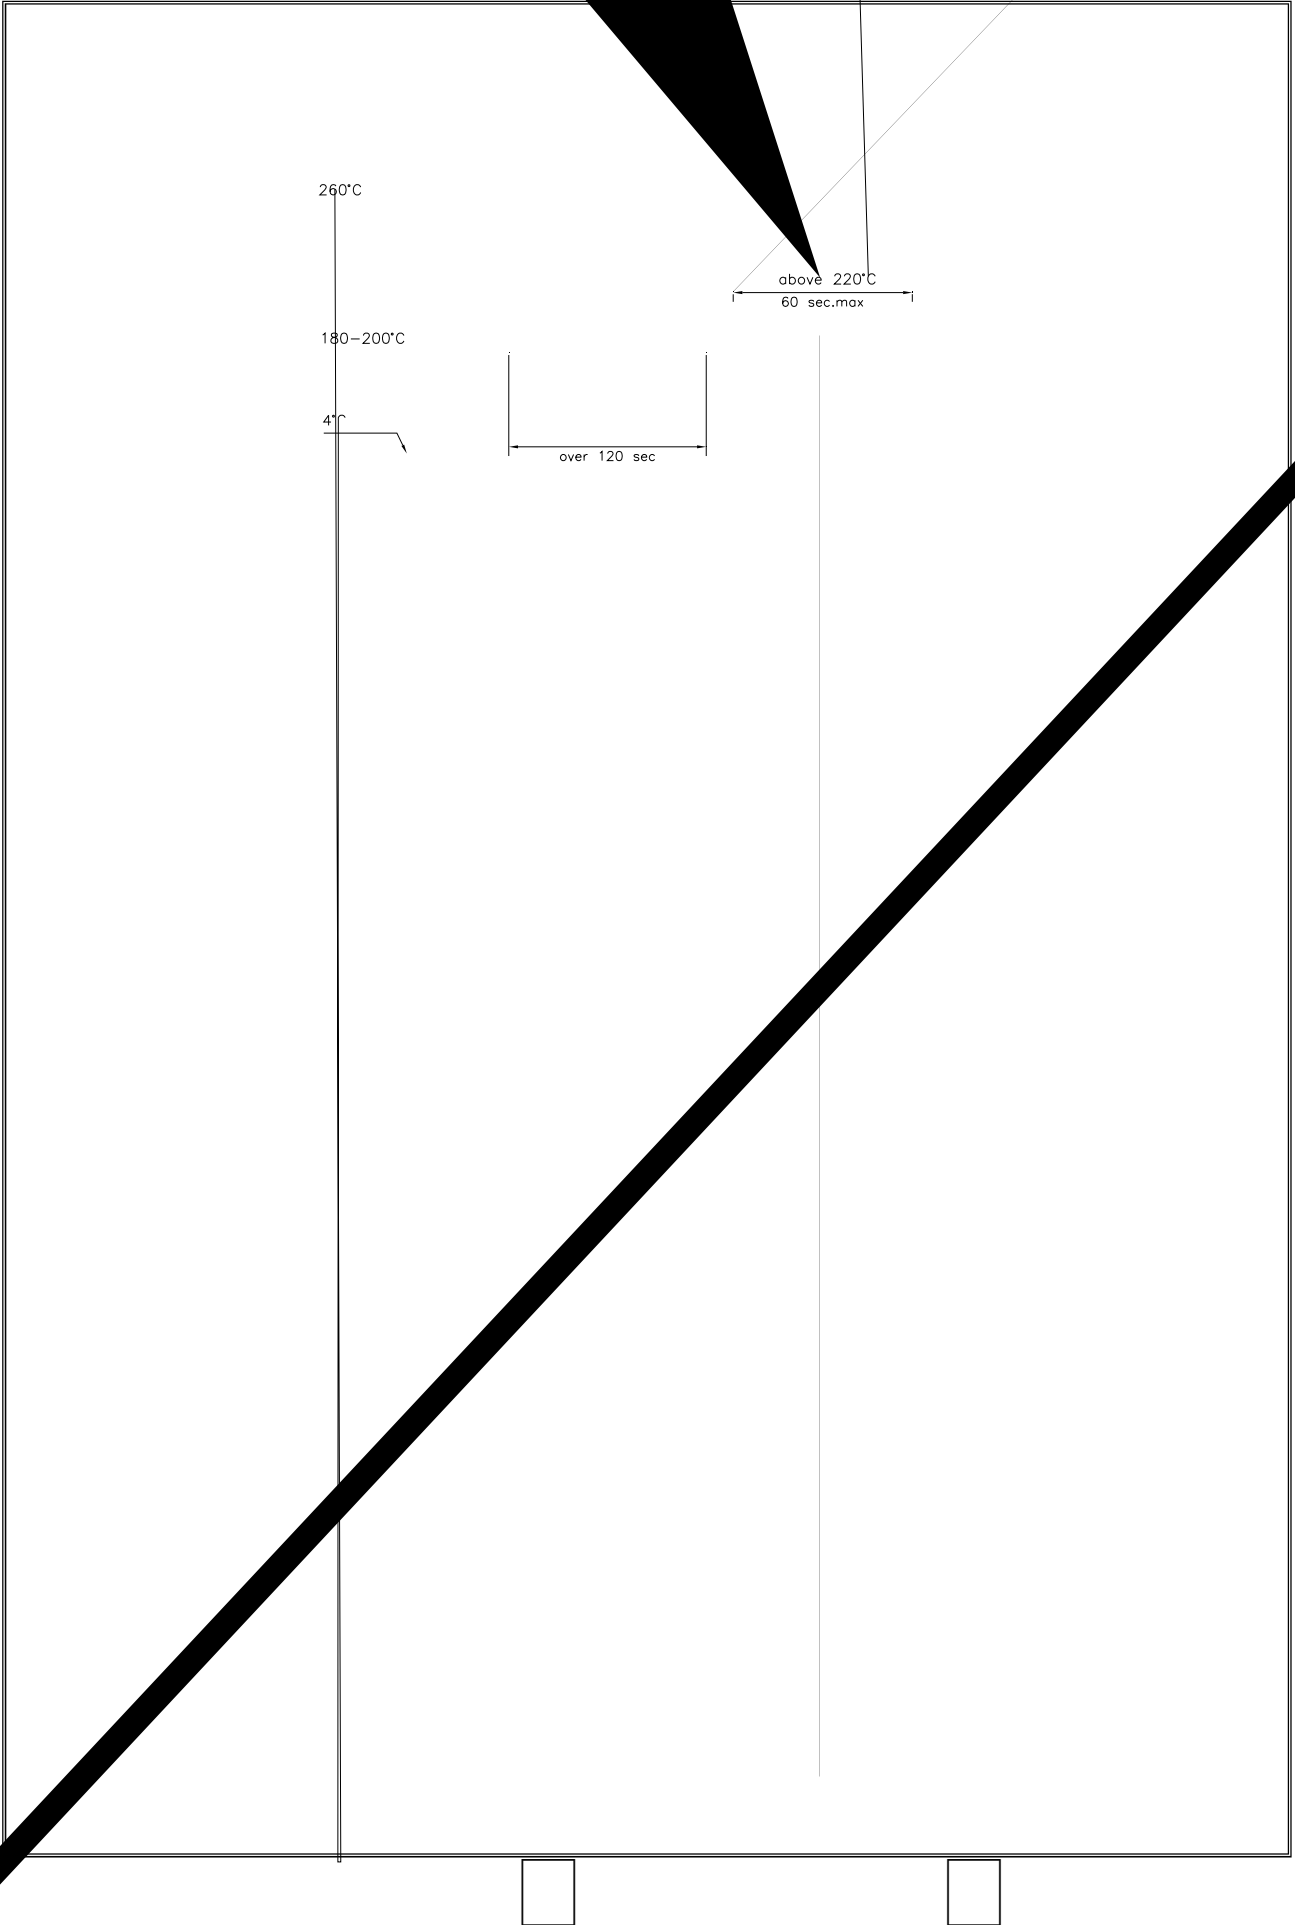



HONGLITRONIC
鸿利光电





LED

LED

100PPM



LED

LED

LED

900PPM


LED

LED

LED

1500PPM

900PPM

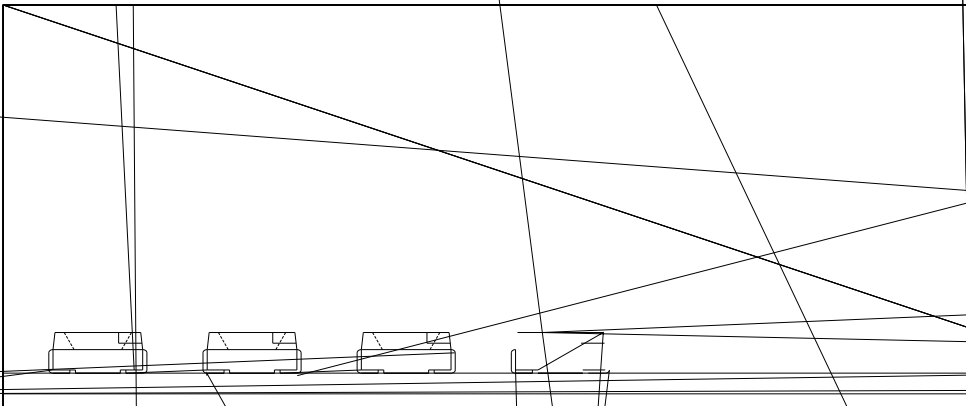

LED





HONGLITRONIC
鸿利光电

