


| <b>TEST REPORT</b><br><b>IEC 62471:2006</b><br><b>Photobiological safety of lamps and lamp systems</b>                                                                                                                                       |                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Report reference No .....                                                                                                                                                                                                                    | RSZ160624558-03                                                                                                       |
| Compiled by (+ signature) .....                                                                                                                                                                                                              | Aror Cheng                          |
| Approved by (+ signature) .....                                                                                                                                                                                                              | Rick Xiao                           |
| Date of issue .....                                                                                                                                                                                                                          | 2016-06-28                                                                                                            |
| Testing laboratory .....                                                                                                                                                                                                                     | Bay Area Compliance Laboratories Corp. (Dongguan)                                                                     |
| Address .....                                                                                                                                                                                                                                | No.69 Pulong Village Puxinhu Industry Zone Tangxia,Dongguan,<br>China.                                                |
| Testing location .....                                                                                                                                                                                                                       | Same as above                                                                                                         |
| Applicant .....                                                                                                                                                                                                                              | Guangzhou Hongli Opto-Electronic Co.,Ltd.                                                                             |
| Address .....                                                                                                                                                                                                                                | NO.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou,<br>China                                               |
| Standard .....                                                                                                                                                                                                                               | IEC 62471:2006                                                                                                        |
| Test sample(s) received.....                                                                                                                                                                                                                 | 2016-06-28                                                                                                            |
| Test in period.....                                                                                                                                                                                                                          | 2016-06-28                                                                                                            |
| Procedure deviation .....                                                                                                                                                                                                                    | N.A.                                                                                                                  |
| Non-standard test method .....                                                                                                                                                                                                               | N.A.                                                                                                                  |
| <b>Note:</b> This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part except in full without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). |                                                                                                                       |
| Type of test object .....                                                                                                                                                                                                                    | LED                                                                                                                   |
| Trademark .....                                                                                                                                                                                                                              | N.A.                                                                                                                  |
| Model/type reference .....                                                                                                                                                                                                                   | HL-A-3528H397W-S1-13L-HR3                                                                                             |
| Manufacturer.....                                                                                                                                                                                                                            | Guangzhou Hongli Opto-Electronic Co., Ltd.<br>NO.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou,<br>China |
| Rating .....                                                                                                                                                                                                                                 | Input: 2.8-3.4Vdc, 100mW 30mA                                                                                         |

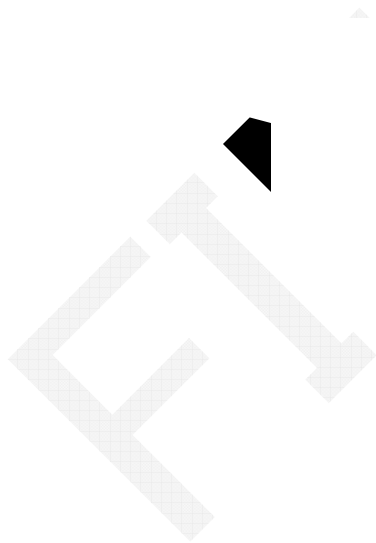

| IEC 62471:2006 |                                                                                                                                                                                                                                                                                                                                       |                                                                     |         |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------|
| Clause         | Requirement + Test                                                                                                                                                                                                                                                                                                                    | Result - Remark                                                     | Verdict |
| 4              | EXPOSURE LIMITS                                                                                                                                                                                                                                                                                                                       |                                                                     | P       |
|                | Contents of the whole Clause 4 of IEC 62471: 2006 moved into a new informative Annex ZB                                                                                                                                                                                                                                               |                                                                     | P       |
|                | Clause 4 replaced by the following:                                                                                                                                                                                                                                                                                                   |                                                                     | P       |
|                | Limits of the Artificial Optical Radiation Directive(2006/25/EC) have been applied instead of those fixed in IEC 62471: 2006                                                                                                                                                                                                          | See the Table 6.1                                                   | P       |
| Annex ZB       | EXPOSURE LIMITS                                                                                                                                                                                                                                                                                                                       |                                                                     | P       |
| 4.1            | General                                                                                                                                                                                                                                                                                                                               |                                                                     | P       |
|                | The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure                                                                                                                                                                             |                                                                     | P       |
|                | Detailed spectral data of a light source are generally required only if the luminance of the source exceeds $10^4 \text{ cd m}^{-2}$                                                                                                                                                                                                  | $>10^4 \text{ cd m}^{-2}$                                           | P       |
| 4.3            | Hazard exposure limits                                                                                                                                                                                                                                                                                                                |                                                                     | P       |
| 4.3.1          | Actinic UV hazard exposure limit for the skin and eye                                                                                                                                                                                                                                                                                 |                                                                     | P       |
|                | The exposure limit for effective radiant exposure is $30 \text{ J.m}^{-2}$ within any 8-hour period                                                                                                                                                                                                                                   |                                                                     | P       |
|                | To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance, $E_s$ , of the light source shall not exceed the levels defined by:                                                                                                    | $E_s = 1.6 \times 10^{-5} \text{ W.m}^{-2}$                         | P       |
|                | $E_s \cdot t = \sum_{200}^{400} \sum_t E_\lambda(\lambda, t) \cdot s_{uv}(\lambda) \cdot \Delta \lambda \cdot \Delta t \leq 30 \text{ J.m}^{-2}$                                                                                                                                                                                      |                                                                     | P       |
|                | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by:                                                                                                                                                                                                            |                                                                     | P       |
|                | $t_{\max} = 30/E_s$                                                                                                                                                                                                                                                                                                                   | $t_{\max} = 30 / (4.4 \times 10^{-5}) = 6.82 \times 10^5 \text{ s}$ | P       |
| 4.3.2          | Near-UV hazard exposure limit for eye                                                                                                                                                                                                                                                                                                 |                                                                     | P       |
|                | For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed $10000 \text{ J.m}^{-2}$ for exposure times less than 1000s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, $E_{UVA}$ , shall not exceed $10 \text{ W.m}^{-2}$ | $E_{UVA} = 4.4 \times 10^{-5} \text{ W.m}^{-2}$                     | P       |
|                | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by:                                                                                                                                                                                         |                                                                     | N       |

IEC 62471:2006

| Clause | Requirement + Test                       | Result - Remark | Verdict |
|--------|------------------------------------------|-----------------|---------|
|        | $t_{max} \leq 10000/E_{UVA}$ s           |                 | N       |
| 4.3.3  | Retinal blue light hazard exposure limit |                 | P       |

To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral irradiance  $\int_{380}^{450} E_{\lambda}(\lambda) \cdot V(\lambda) \cdot \lambda^2 \cdot d\lambda$  shall not exceed the following limits:

FINAL

| IEC 62471:2006 |                                                                                                                                                                                                                                                       |                                                               |         |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|---------|
| Clause         | Requirement + Test                                                                                                                                                                                                                                    | Result - Remark                                               | Verdict |
|                | $L_{IR} = \sum_{780}^{1400} L_{\lambda} \cdot R(\lambda) \cdot \Delta\lambda \leq \frac{6000}{\alpha} \quad \text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$                                                                                            | $L_{IR} = 2.4 \text{ W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$ | P       |
| 4.3.7          | Infrared radiation hazard exposure limits for the eye                                                                                                                                                                                                 |                                                               | P       |
|                | The avoid thermal injury of the cornea and possible delayed effects upon the lens of the eye (cataractogenesis),ocular exposure to infrared radiation, EIR,over the wavelength range 780 nm to 3000 nm, for times less than 1000 s, shall not exceed: |                                                               | N       |
|                | $E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta\lambda \leq 18000 \cdot t^{-0,75} \quad \text{W}\cdot\text{m}^{-2}$                                                                                                                              |                                                               | N       |
|                | For times greater than 1000 s the limit becomes:                                                                                                                                                                                                      |                                                               | P       |
|                | $E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta\lambda \leq 100 \quad \text{W}\cdot\text{m}^{-2}$                                                                                                                                                | $E_{IR} = 0 \text{ W}\cdot\text{m}^{-2}$                      | P       |
| 4.3.8          | Thermal hazard exposure limit for the skin                                                                                                                                                                                                            |                                                               | P       |
|                | Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to:                                                                                                                                                            |                                                               | P       |
|                | $E_H \cdot t = \sum_{380}^{3000} \sum_t E_{\lambda}(\lambda, t) \cdot \Delta t \cdot \Delta\lambda \leq 20000 \cdot t^{0,25} \quad \text{J}\cdot\text{m}^{-2}$                                                                                        | $E_H \cdot t = 0 \text{ J}\cdot\text{m}^{-2}$                 | P       |
| 5              | MEASUREMENT OF LAMPS AND LAMP SYSTEMS                                                                                                                                                                                                                 |                                                               | P       |
| 5.1            | Measurement conditions                                                                                                                                                                                                                                |                                                               | P       |
|                | Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification.                                                                                                             |                                                               | P       |
| 5.1.1          | Lamp ageing (seasoning)                                                                                                                                                                                                                               |                                                               | N       |
|                | Seasoning of lamps shall be done as stated in the Appropriate EN lamp standard.                                                                                                                                                                       |                                                               | N       |
| 5.1.2          | Test environment                                                                                                                                                                                                                                      | 25.3                                                          | P       |

For specific test conditions, see the appropriate EN lamp standard or in absence of such



| IEC 62471:2006 |                                                                                                                                                                                                                               |                        |         |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------|
| Clause         | Requirement + Test                                                                                                                                                                                                            | Result - Remark        | Verdict |
|                | To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired.                                                                    |                        | N       |
| 5.3.2          | Calculations                                                                                                                                                                                                                  |                        | P       |
|                | The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy.                                                              |                        | P       |
| 5.3.3          | Measurement uncertainty                                                                                                                                                                                                       |                        | P       |
|                | The quality of all measurement results must be quantified by an analysis of the uncertainty.                                                                                                                                  |                        | P       |
| 6              | LAMP CLASSIFICATION                                                                                                                                                                                                           |                        | P       |
|                | For the purposes of this standard it was decided that the values shall be reported as follows:                                                                                                                                |                        | P       |
|                | – for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm |                        | N       |
|                | – for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm                                                                                                     | At a distance of 200mm | P       |
| 6.1            | Continuous wave lamps                                                                                                                                                                                                         |                        | P       |
| 6.1.1          | Exempt Group                                                                                                                                                                                                                  |                        | P       |
|                | In the except group are lamps, which does not pose any photobiological hazard. The requirement is met by any lamp that does not pose:                                                                                         |                        | P       |
|                | – an actinic ultraviolet hazard (ES) within 8-hours exposure (30000 s), nor                                                                                                                                                   |                        | P       |
|                | – a near-UV hazard (EUVA) within 1000 s, (about 16 min), nor                                                                                                                                                                  |                        | P       |
|                | – a retinal blue-light hazard (LB) within 10000 s (about 2,8 h), nor                                                                                                                                                          |                        | P       |
|                | – a retinal thermal hazard (LR) within 10 s, nor                                                                                                                                                                              |                        | P       |
|                | – an infrared radiation hazard for the eye (EIR) within 1000 s                                                                                                                                                                |                        | P       |
| 6.1.2          | Risk Group 1 (Low-Risk)                                                                                                                                                                                                       |                        | N       |
|                | In this group are lamps, which exceeds the limits for the except group but that does not pose:                                                                                                                                |                        | N       |
|                | – an actinic ultraviolet hazard (ES) within 10000 s, nor                                                                                                                                                                      |                        | N       |
|                | – a near ultraviolet hazard (EUVA) within 300 s, nor                                                                                                                                                                          |                        | N       |
|                | – a retinal blue-light hazard (LB) within 100 s, nor                                                                                                                                                                          |                        | N       |
|                | – a retinal thermal hazard (LR) within 10 s, nor                                                                                                                                                                              |                        | N       |
|                | – an infrared radiation hazard for the eye (EIR) within 100 s                                                                                                                                                                 |                        | N       |

| IEC 62471:2006 |                                                                                                                                                                                                                                                          |                 |         |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause         | Requirement + Test                                                                                                                                                                                                                                       | Result - Remark | Verdict |
|                | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 100 s are in Risk Group 1.                                                                                              |                 | N       |
| 6.1.3          | Risk Group 2 (Moderate-Risk)                                                                                                                                                                                                                             |                 | N       |
|                | This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose:                                                                                                                                                    |                 | N       |
|                | – an actinic ultraviolet hazard (ES) within 1000 s exposure, nor                                                                                                                                                                                         |                 | N       |
|                | – a near ultraviolet hazard (EUVA) within 100 s, nor                                                                                                                                                                                                     |                 | N       |
|                | – a retinal blue-light hazard (LB) within 0,25 s (aversion response), nor                                                                                                                                                                                |                 | N       |
|                | – a retinal thermal hazard (LR) within 0,25 s (aversion response), nor                                                                                                                                                                                   |                 | N       |
|                | – an infrared radiation hazard for the eye (EIR) within 10 s                                                                                                                                                                                             |                 | N       |
|                | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 10 s are in Risk Group 2.                                                                                               |                 | N       |
| 6.1.4          | Risk Group 3 (High-Risk)                                                                                                                                                                                                                                 |                 | N       |
|                | Lamps which exceed the limits for Risk Group 2 are in Group 3.                                                                                                                                                                                           |                 | N       |
| 6.2            | Pulsed lamps                                                                                                                                                                                                                                             |                 | N       |
|                | Pulse lamp criteria shall apply to a single pulse and to any group of pulses within 0,25 s.                                                                                                                                                              |                 | N       |
|                | A pulsed lamp shall be evaluated at the highest nominal energy loading as specified by the manufacturer.                                                                                                                                                 |                 | N       |
|                | The risk group determination of the lamp being tested shall be made as follows:                                                                                                                                                                          |                 | N       |
|                | – a lamp that exceeds the exposure limit shall be classified as belonging to Risk Group 3 (High-Risk)                                                                                                                                                    |                 | N       |
|                | – for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group                                                                                         |                 | N       |
|                | – for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance dose is below the EL, shall be evaluated using the continuous wave risk criteria discussed in clause 6.1, using time averaged values of the pulsed emission |                 | N       |



IEC 62471:2006

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| Table 4.1                    |                                        | Spectral weighting function for assessing ultraviolet hazards for skin and eye |                                        | - |
|------------------------------|----------------------------------------|--------------------------------------------------------------------------------|----------------------------------------|---|
| Wavelength <sup>1</sup> , nm | UV hazard function S <sub>uv</sub> ( ) | Wavelength, nm                                                                 | UV hazard function S <sub>uv</sub> ( ) |   |
| 200                          | 0.030                                  | 313*                                                                           | 0.006                                  |   |
| 205                          | 0.051                                  | 315                                                                            | 0.003                                  |   |
| 210                          | 0.075                                  | 316                                                                            | 0.0024                                 |   |
| 215                          | 0.095                                  | 317                                                                            | 0.0020                                 |   |
| 220                          | 0.120                                  | 318                                                                            | 0.0016                                 |   |
| 225                          | 0.150                                  | 319                                                                            | 0.0012                                 |   |
| 230                          | 0.190                                  | 320                                                                            | 0.0010                                 |   |
| 235                          | 0.240                                  | 322                                                                            | 0.00067                                |   |
| 240                          | 0.300                                  | 323                                                                            | 0.00054                                |   |
| 245                          | 0.360                                  | 325                                                                            | 0.00050                                |   |
| 250                          | 0.430                                  | 328                                                                            | 0.00044                                |   |
| 254*                         | 0.500                                  | 330                                                                            | 0.00041                                |   |
| 255                          | 0.520                                  | 333                                                                            | 0.00037                                |   |
| 260                          | 0.650                                  | 335                                                                            | 0.00034                                |   |
| 265                          | 0.810                                  | 340                                                                            | 0.00028                                |   |
| 270                          | 1.000                                  | 345                                                                            | 0.00024                                |   |
| 275                          | 0.960                                  | 350                                                                            | 0.00020                                |   |
| 280*                         | 0.880                                  | 355                                                                            | 0.00016                                |   |
| 285                          | 0.770                                  | 360                                                                            | 0.00013                                |   |
| 290                          | 0.640                                  | 365*                                                                           | 0.00011                                |   |
| 295                          | 0.540                                  | 370                                                                            | 0.000093                               |   |
| 297                          | 0.460                                  | 375                                                                            | 0.000077                               |   |
| 300                          | 0.300                                  | 380                                                                            | 0.000064                               |   |
| 303*                         | 0.120                                  | 385                                                                            | 0.000053                               |   |
| 305                          | 0.060                                  | 390                                                                            | 0.000044                               |   |
| 308                          | 0.026                                  | 395                                                                            | 0.000036                               |   |
| 310                          | 0.015                                  | 400                                                                            | 0.000030                               |   |

<sup>1</sup> Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths.  
\* Emission lines of a mercury discharge spectrum.

IEC 62471:2006

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| Table 4.2        | Spectral weighting functions for assessing retinal hazards from broadband optical sources |                             | - |
|------------------|-------------------------------------------------------------------------------------------|-----------------------------|---|
| Wavelength<br>nm | Blue-light hazard function<br>B()                                                         | Burn hazard function<br>R() |   |
| 300              | 0.01                                                                                      | -                           |   |
| 305              | 0.01                                                                                      | -                           |   |
| 310              | 0.01                                                                                      | -                           |   |
| 315              | 0.01                                                                                      | -                           |   |
| 320              | 0.01                                                                                      | -                           |   |
| 325              | 0.01                                                                                      | -                           |   |
| 330              | 0.01                                                                                      | -                           |   |
| 335              | 0.01                                                                                      | -                           |   |
| 340              | 0.01                                                                                      | -                           |   |
| 345              | 0.01                                                                                      | -                           |   |
| 350              | 0.01                                                                                      | -                           |   |
| 355              | 0.01                                                                                      | -                           |   |
| 360              | 0.01                                                                                      | -                           |   |
| 365              | 0.01                                                                                      | -                           |   |
| 370              | 0.01                                                                                      | -                           |   |
| 375              | 0.01                                                                                      | -                           |   |
| 380              | 0.01                                                                                      | 0.1                         |   |
| 385              | 0.013                                                                                     | 0.13                        |   |
| 390              | 0.025                                                                                     | 0.25                        |   |
| 395              | 0.05                                                                                      | 0.5                         |   |
| 400              | 0.10                                                                                      | 1.0                         |   |
| 405              | 0.20                                                                                      | 4                           |   |

IEC 62471:2006

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| <b>Table 5.4</b>                                                                   |                                                             |                     |                            |                            | -                                             |
|------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------|----------------------------|----------------------------|-----------------------------------------------|
| Summary of the ELs for the surface of the skin or cornea (irradiance based values) |                                                             |                     |                            |                            |                                               |
| Hazard Name                                                                        | Relevant equation                                           | Wavelength Range nm | Exposure aperture rad(deg) | Limiting aperture rad(deg) | EL in terms of constant irradiance $W.m^{-2}$ |
| Actinic UV skin & eye                                                              | $E_S = \sum E_\lambda \cdot S(\lambda) \cdot \Delta\lambda$ | 200 – 400           | < 30000                    | 1.4 (80)                   | 30/t                                          |
| Eye UV-A                                                                           | $E_{UVA} = \sum E_\lambda \cdot \Delta\lambda$              | 315 – 400           | $\leq 1000$<br>>1000       | 1.4 (80)                   | 10000/t<br>10                                 |
| Blue-light small source                                                            | $E_B = \sum E_\lambda \cdot B(\lambda) \cdot \Delta\lambda$ | 300 – 700           | $\leq 100$<br>>100         | < 0.011                    | 100/t<br>1,0                                  |
| Eye IR                                                                             | $E_{IR} = \sum E_\lambda \cdot \Delta\lambda$               | 780 – 3000          | $\leq 1000$<br>>1000       | 1.4 (80)                   | 18000/t <sup>0.75</sup><br>100                |
| Skin thermal                                                                       | $E_H = \sum E_\lambda \cdot \Delta\lambda$                  | 380 – 3000          | < 10                       | 2π sr                      | 20000/t <sup>0.75</sup>                       |

| <b>Table 5.5</b>                                          |                                                                |                     |                                                  |                                                                        | -                                                                  |
|-----------------------------------------------------------|----------------------------------------------------------------|---------------------|--------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------|
| Summary of the ELs for the retina (radiance based values) |                                                                |                     |                                                  |                                                                        |                                                                    |
| Hazard Name                                               | Relevant equation                                              | Wavelength Range nm | Exposure duration Sec                            | Field of view radians                                                  | EL in terms of constant radiance $W.m^{-2}.sr^{-1}$                |
| Blue light                                                | $L_B = \sum L_\lambda \cdot B(\lambda) \cdot \Delta\lambda$    | 300 – 700           | 0.25 – 10<br>10-100<br>100-10000<br>$\geq 10000$ | $0.011 \cdot \sqrt{(t/10)}$<br>0.011<br>$0.0011 \cdot \sqrt{t}$<br>0.1 | $10^6/t$<br>$10^6/t$<br>$10^6/t$<br>100                            |
| Retinal thermal                                           | $L_R = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$    | 380 – 1400          | < 0,25<br>0.25 – 10                              | 0,0017<br>$0.011 \cdot \sqrt{(t/10)}$                                  | $50000/(\alpha \cdot t^{0.25})$<br>$50000/(\alpha \cdot t^{0.25})$ |
| Retinal thermal (weak visual stimulus)                    | $L_{IR} = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$ | 780 – 1400          | > 10                                             | 0.011                                                                  | 6000/α                                                             |

IEC 62471:2006

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| Table 6.1                               | Emission limits for risk groups of continuous wave lamps base on Directive(2006/25/EC) |                    |           |                                               |                      |                                               |        |                                               | P      |
|-----------------------------------------|----------------------------------------------------------------------------------------|--------------------|-----------|-----------------------------------------------|----------------------|-----------------------------------------------|--------|-----------------------------------------------|--------|
| Risk                                    | Action spectrum                                                                        | Units              | Symbol    | Exempt                                        |                      | Low risk                                      |        | Mod risk                                      |        |
|                                         |                                                                                        |                    |           | Limit                                         | Result               | Limit                                         | Result | Limit                                         | Result |
| Actinic UV                              | $S_{uv}(\lambda)$                                                                      | $W.m^{-2}$         | $E_S$     | 0.001                                         | $1.6 \times 10^{-5}$ | 0.003                                         | --     | 0.03                                          | --     |
| Near UV                                 |                                                                                        | $W.m^{-2}$         | $E_{UVA}$ | 10                                            | $4.4 \times 10^{-5}$ | 33                                            | --     | 100                                           | --     |
| Blue light                              | $B(\lambda)$                                                                           | $W.m^{-2}.sr^{-1}$ | $L_B$     | 100                                           | $5.7 \times 10^{-1}$ | 10000                                         | --     | 4000000                                       | --     |
| Blue light, small source                | $B(\lambda)$                                                                           | $W.m^{-2}$         | $E_B$     | 1                                             | -                    | 1                                             | --     | 400                                           | --     |
| Retinal thermal                         | $R(\lambda)$                                                                           | $W.m^{-2}.sr^{-1}$ | $L_R$     | $\frac{28000}{\alpha}$<br>( $\alpha=0.0100$ ) | $1.7 \times 10^3$    | $\frac{28000}{\alpha}$<br>( $\alpha=0.0100$ ) | --     | $\frac{71000}{\alpha}$<br>( $\alpha=0.0100$ ) | --     |
| Retinal thermal, Weak visual stimulus** | $R(\lambda)$                                                                           | $W.m^{-2}.sr^{-1}$ | $L_{IR}$  | $\frac{6000}{\alpha}$<br>( $\alpha=0.0100$ )  | 2.4                  | $\frac{6000}{\alpha}$<br>( $\alpha=0.0100$ )  | --     | $\frac{28000}{\alpha}$<br>( $\alpha=0.0100$ ) | --     |
| IR radiation Eye                        |                                                                                        | $W.m^{-2}$         | $E_{IR}$  | 100                                           | 0                    | 570                                           | --     | 3200                                          | --     |

\* Small source defined as one with  $< 0,011$  radian. Averaging field of view at 10000 s is 0,1 radian.

\*\* Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2


The appliance apertuer diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5


Appendix I Figure of Spectral distribution

Spectral distribution

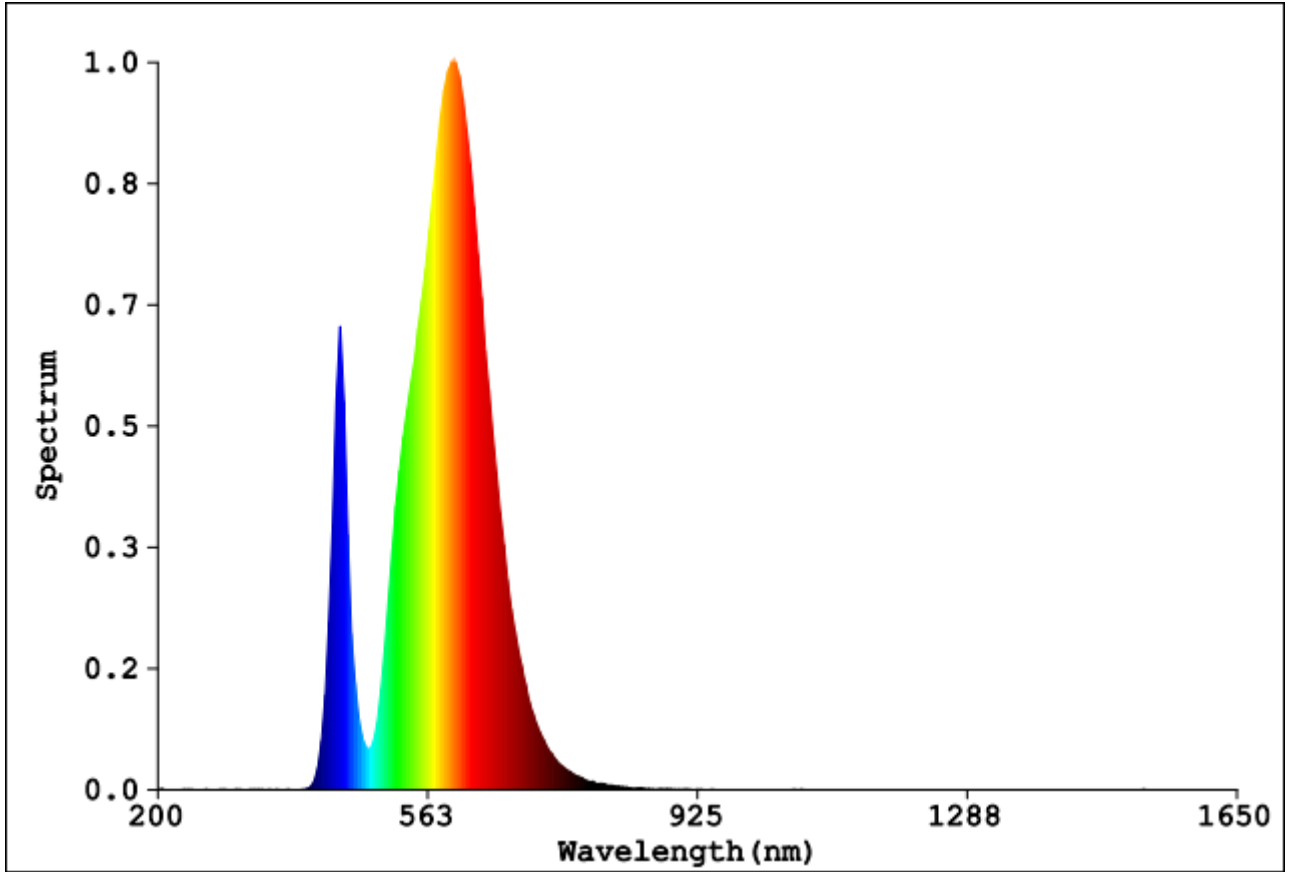


Appendix A –EUT Photos

The top view of EUT

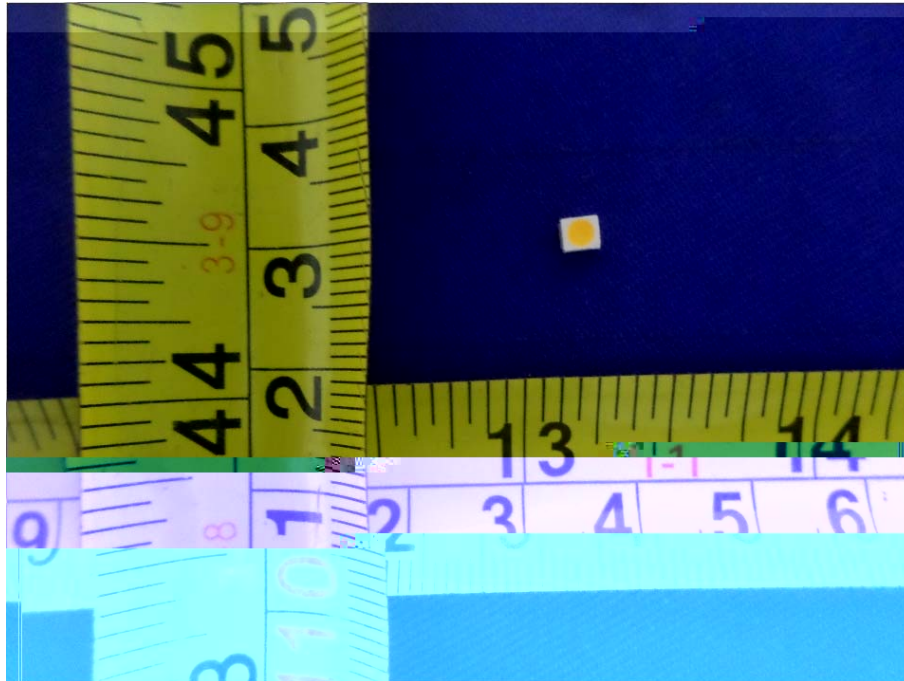

The bottom view of EUT

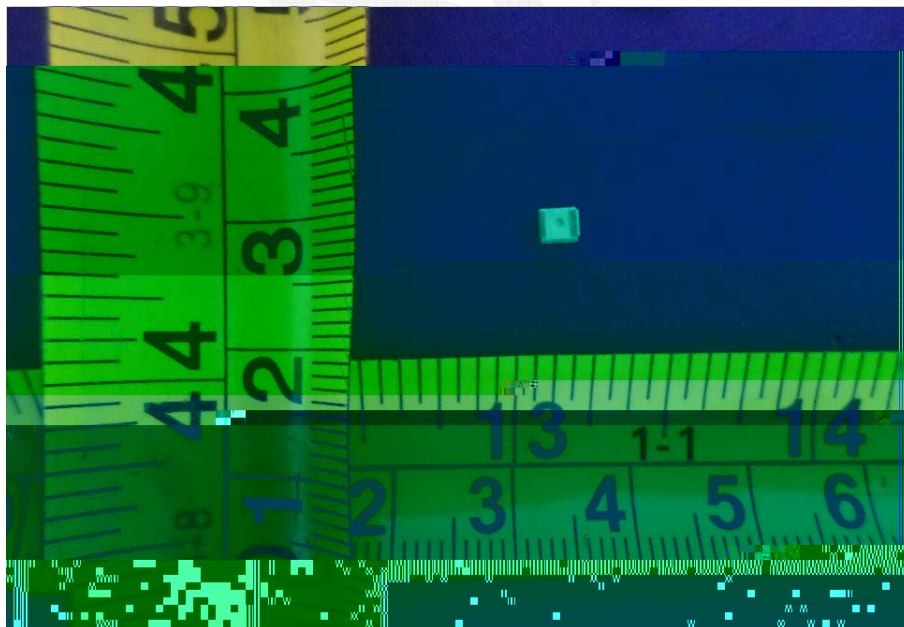

### Appendix B –Test equipment list

| Equipment Description                                  | Model No  | BACL#        | Manufacturer | Last Cal   | Cal Due    |
|--------------------------------------------------------|-----------|--------------|--------------|------------|------------|
| UV light leakage spectrum of biological safety systems | PMS-700   | T-08-SF140   | EVERFINE     | 2014-12-30 | 2016-12-29 |
| Imaging luminance meter                                | CX-2K     | T-08-SF140-1 | EVERFINE     | 2014-12-30 | 2016-12-29 |
| Radiation illuminance meter                            | RD-2000   | T-08-SF140-2 | EVERFINE     | 2014-12-30 | 2016-12-29 |
| Radiation illuminance meter                            | RD-2000   | T-08-SF140-3 | EVERFINE     | 2014-12-30 | 2016-12-29 |
| High Accuracy Array                                    | HAAS-2000 | T-08-SF140-4 | EVERFINE     | 2014-12-30 | 2016-12-29 |
| Hygrothermograph                                       | PWS280    | T-08-QA026   | N/A          | 2016-3-21  | 2017-3-21  |
| Standard power spectral UV radiation-specific          | UVS-8003  | T-08-EE048   | EVERFINE     | 2016-3-21  | 2017-3-21  |
| 80mm sample integrating sphere                         | SMS-300   | F-08-SF130   | EVERFINE     | 2014-12-26 | 2016-12-25 |
| Steel tape                                             | HILOCK-19 | T-08-SF100   | TAJIMA       | 2013-4-18  | 2018-4-17  |

\*\*\* End of report \*\*\*