HVB-3433EES

3433 PLCC6 Products Series

High luminous efficiency, consistency, stability and reliability, it is mainly used in automobile applications.

- PPA
- 50% I_V 120
- 470nm
- AEC-Q102 & IEC 60810

Ordering Information

Type				Luminous Intensity I_V @ I_f=140mA	Ordering Code
HVB-3433EES-	XXXX	XX	XX		
	Brightness	Color	Forward Voltage	1.80 -4.50 cd	XXXXXX

■

HVB-3433EES-BACB-XX-XX

4

BA BB CA CB

■

HVB-3433EES-XXXX-35-XX

4

3 4 5

■

HVB-3433EES-XXXX-XX-47

4

4 5 6 7

Note

■ Brightness Grouping

Only one brightness group will be packed in each reel. Please refer to page #4 for details.

E.g.: HVB-3433EES-CBDB-XX-XX, means only one bin of CB, DA or DB is in each reel.

■ Color Grouping

Only one color group will be packed in each reel. Please refer to page #4 for details.

E.g.: HVB-3433EES-XXXX-35-XX, means only one bin of 3, 4 or 5 is in each reel.

■ Forward Voltage Groups

Only one forward voltage group will be packed in each reel. Please refer to page #4 for details.

E.g.: HVB-3433EES-XXXX-XX-47, means only one bin of 4, 5, 6 or 7 is in each reel.

Brightness Grouping (T_s $_f$ = 140 mA)

Grouping	Luminous Intensity I_V min.	Luminous Intensity I_V max.	Luminous Flux $_v$ typ.
BA	1.80 cd	2.24 cd	6.30 lm
BB	2.24 cd	2.80 cd	7.90 lm
CA	2.80 cd	3.55 cd	9.90 lm
CB	3.55 cd	4.50 cd	12.60 lm

Forward Voltage Grouping (T_s $_f$ = 140 mA)

Grouping	Forward Voltage V_f min.	Forward Voltage V_f max.
4	2.90 V	3.20 V
5	3.20 V	3.50 V
6	3.50 V	3.80 V
7	3.80 V	4.10 V

Dominant Wavelength Grouping (T_s $_f$ = 140 mA)

Grouping	Dominant Wavelength $_{dom}$ min	Dominant Wavelength $_{dom}$ max
3	464 nm	468 nm
4	468 nm	472 nm
5	472 nm	476 nm

Information on Label

E.g. BA-3-4

Brightness	Wavelength	Forward Voltage
BA	3	4

- V( ) =

Relative Spectral Emission - V( ) = Standard Eye Response Curve

I_{rel} = f ( ); T_s $_f$ = 140 mA

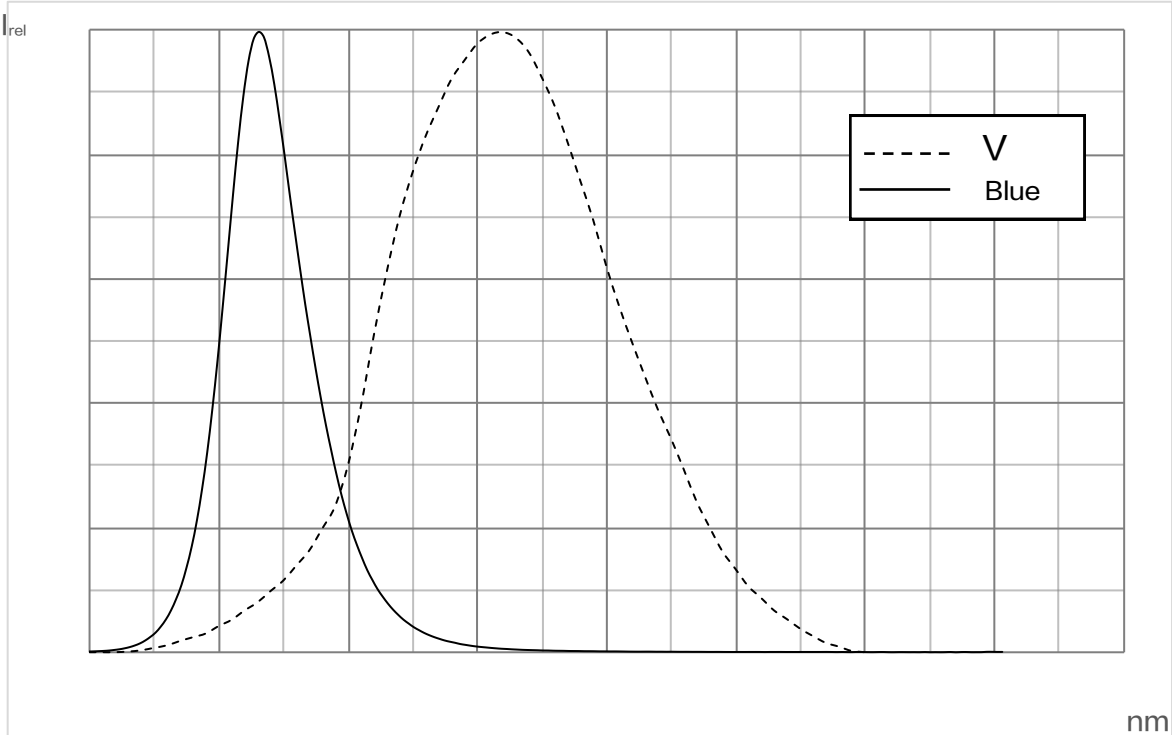

Relative Forward Voltage

$V_f = V_f - V_f$ $_j$); I_f = 140 mA

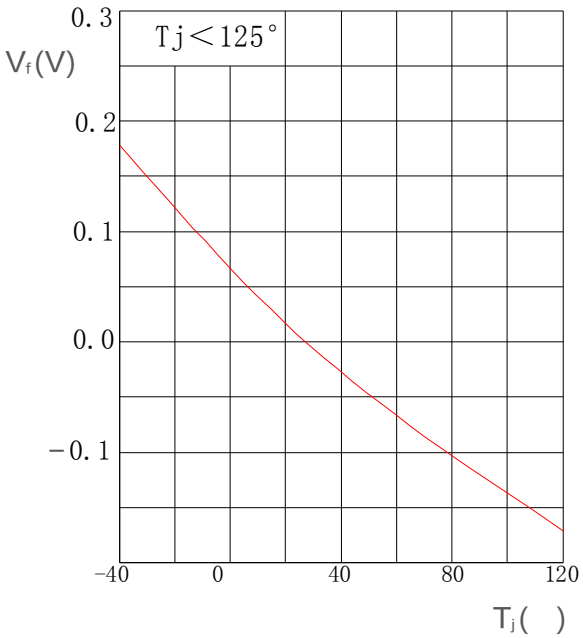

Relative Luminous Intensity

I_v / I_v $_j$); I_f = 140 mA

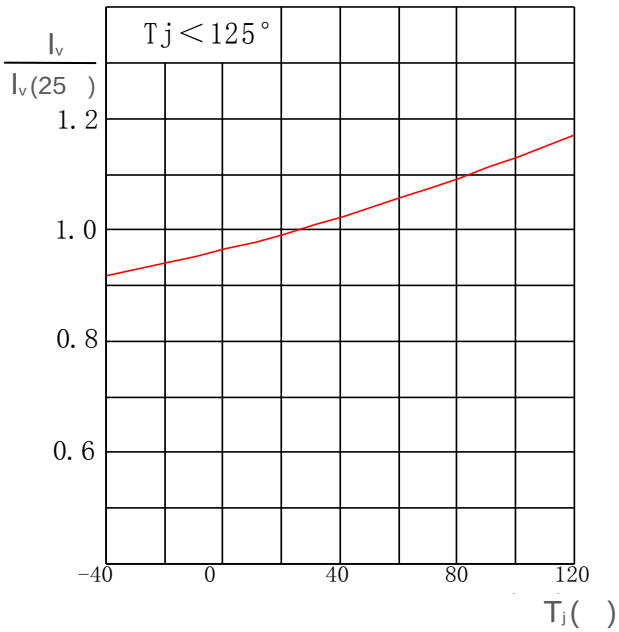

Solder point Temperature

vs. Forward Current

$I_f = f$ T_s

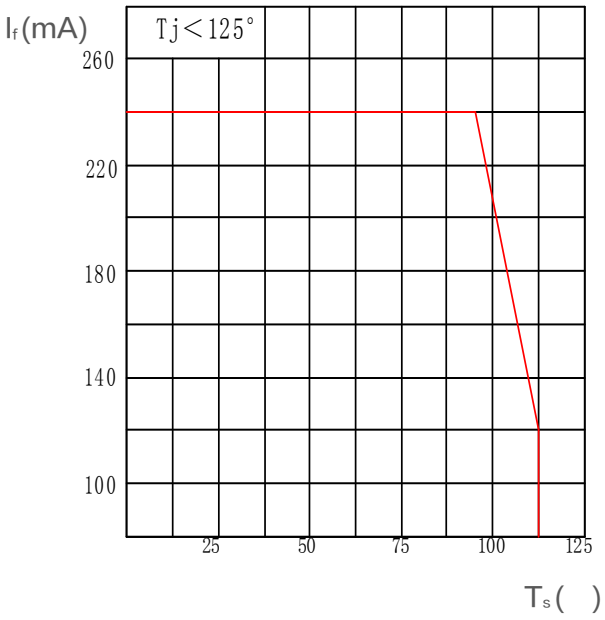

Package Outline

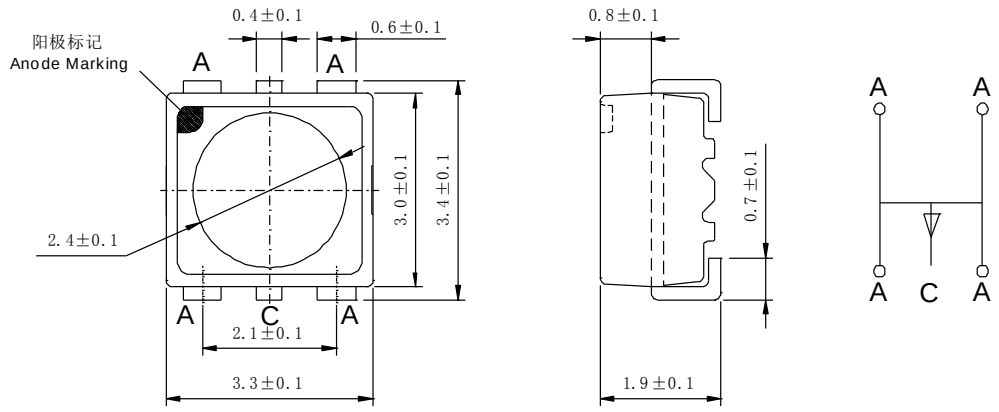

- 40mg
-
- Class 3B

: 1) H_2S ! 2 , 336 IEC 60068-2-43)
2) 2
IEC 60068-2-60 4: 10ppb H_2S, 200ppb SO_2, 200ppb NO_2, 10ppb Cl_2)

NOTE

- Approximate Weight: 30mg
- Mark: Anode
- Corrosion test: Class 3B

Test conditions: 1) H2S test ! 2 , 15ppm, 336hours
(Standards IEC 60068-2-43)
2) Flowing 2 R
(Standards IEC 60068-2-60 test method 4: 10ppb H_2S, 200ppb SO_2, 200ppb NO_2, 10ppb Cl_2)

Recommended Solder Pad

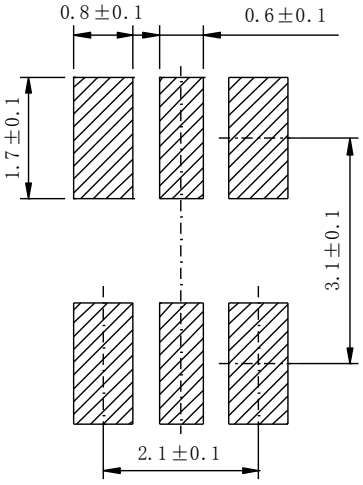

-

NOTE

- Package not suitable for ultrasonic cleaning

Reflow Soldering Profile

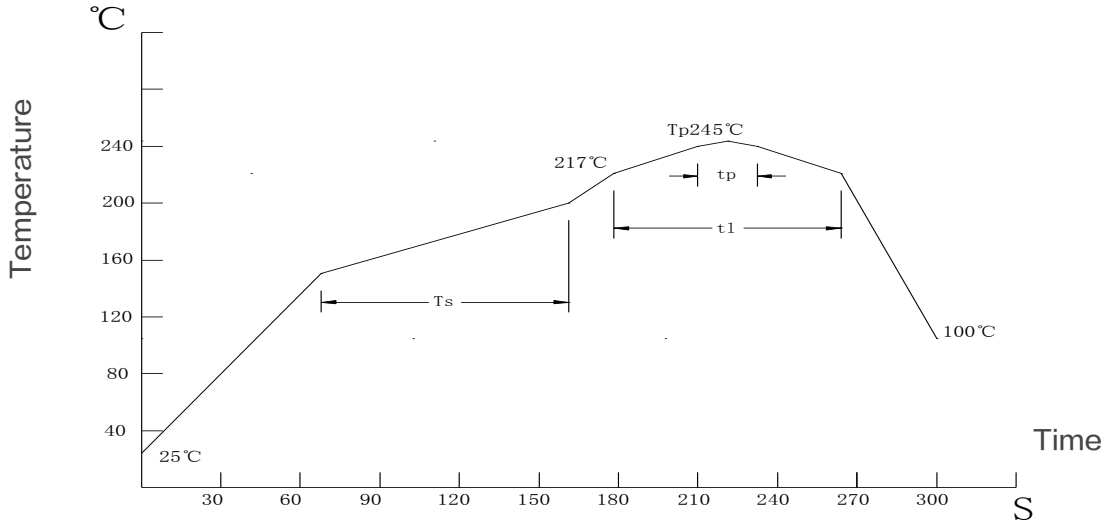

Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		min.	rec.	max.	
Ramp-up Rate to Preheat 25 -150	-	-	2	3	/s
Time T_{smin} to T_{smax}	T_s	60	100	120	s
Ramp-up Rate to Peak T_{smax} to T_p	-	-	2	3	s
Liquidus Temperature	T_l		217		
Time above Liquidus Temperature	t_l	-	80	100	s
Peak Temperature	T_p	-	245	260	
5 Time within 5 of the Specified Peak Temperature	t_p	10	20	30	s
Ramp-down Rate T_p to 100	-	-	3	6	s
Time 25 to T_p	-	-	-	480	s

Barcode-Product-Label (BPL)

Dry Packing Process and Materials

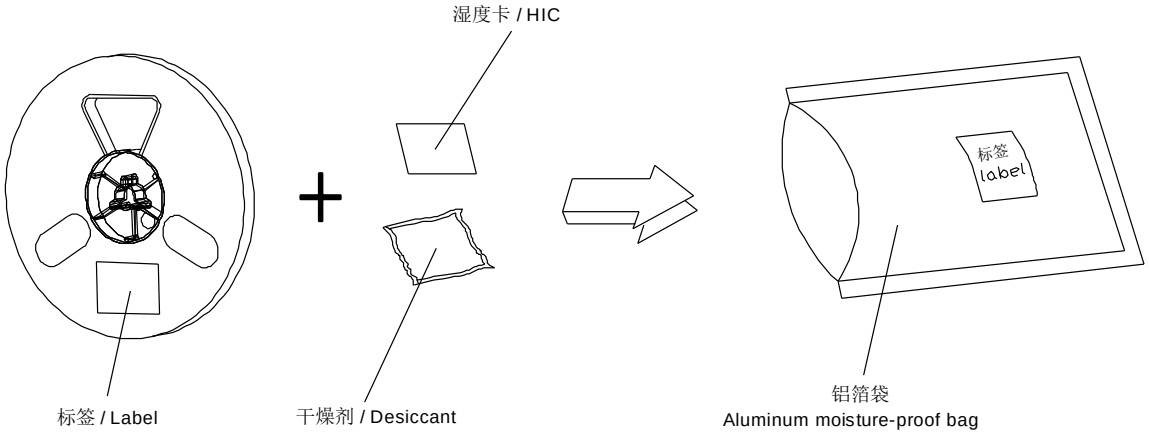

JEDEC

NOTE

Moisture-sensitive product is packed in a dry bag containing desiccant and HIC (humidity indicator card). Regarding dry pack you may find further information in the internet or JEDEC.

Transportation Packing and Materials

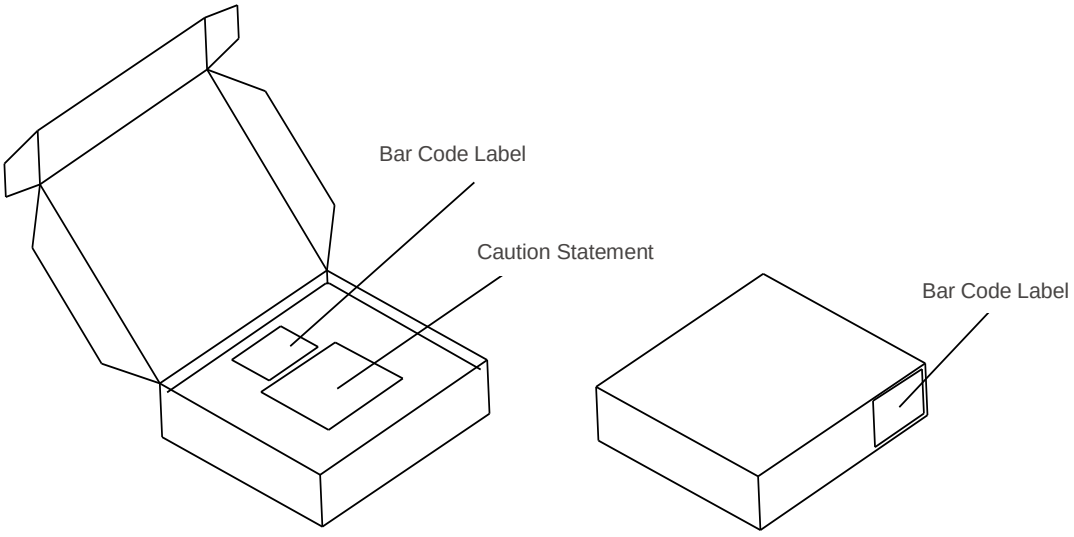

Dimensions of Transportation Box (mm)

Width	Length	Height
256 5	223 5	62 5
256 5	223 5	124 5

:
: ,
8ms 0.05V 0.1V
GUM K=3
25ms 0.5nm 1nm
GUM K=3
25ms 8% 11%
GUM K=3

Glossary

Typical Values: Actual values of each product may differ from these statistical values .
Tolerance of Measure: Unless otherwise noted in drawing, tolerances are specified with +/ −0.1mm.
Forward Voltage: The forward voltage is measured during a current pulse of typically 8 ms, R M M MM GUM with a coverage factor of k = 3).
Wavelength: The wavelength is measured at a current pulse of typically 25 ms, R M M MM GUM with a coverage factor of k = 3).
Brightness: Brightness values are measured during a current pulse of typically 25 ms, R M M MM 1 7 with a coverage factor of k = 3).

Special Statement: The final interpretation of this specification shall be vested in Honglitronic, in the case of ambiguity, the Chinese version shall prevail.