







.


.

.

.

/



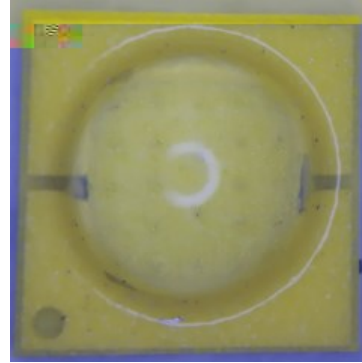



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES





-
-
-
-
-

)便携式照明

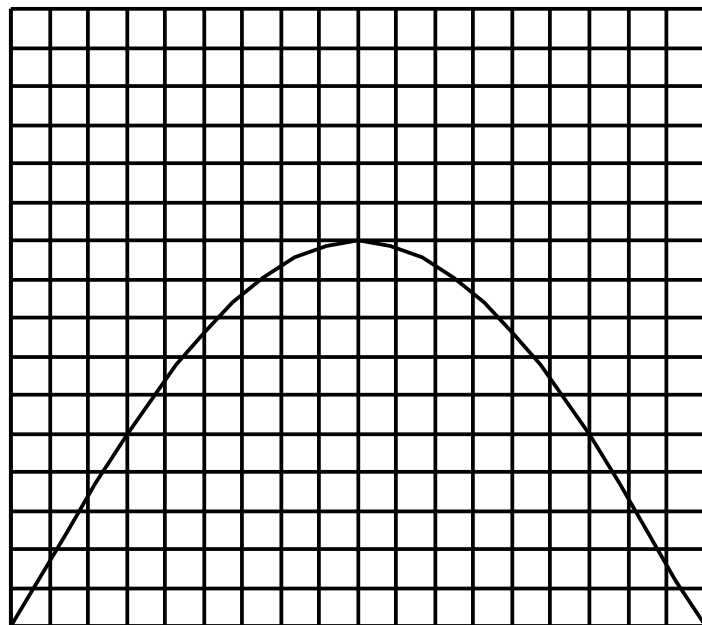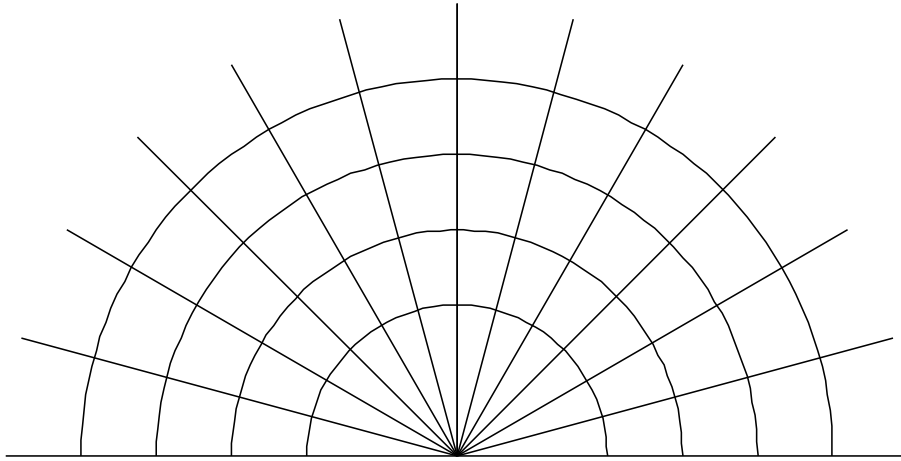



			°
			degrees
		°	°

:

°C,



HONGLI TRONIC
鸿利光电

:







Notes

2.





$T_a=25^{\circ}\text{C}$

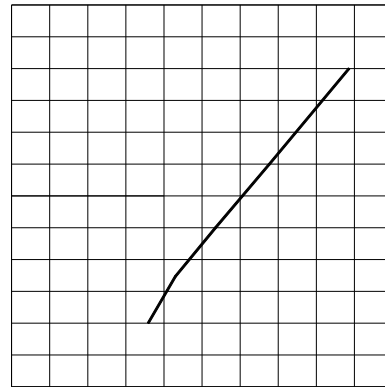
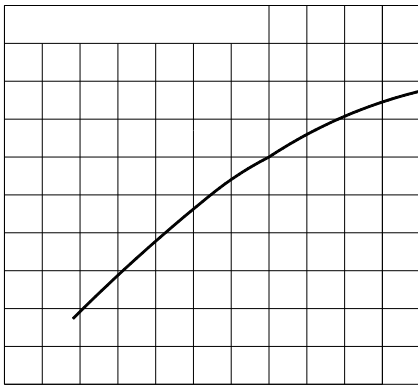


Solder Temperature vs. Relative Luminous Flux


IF=350mA

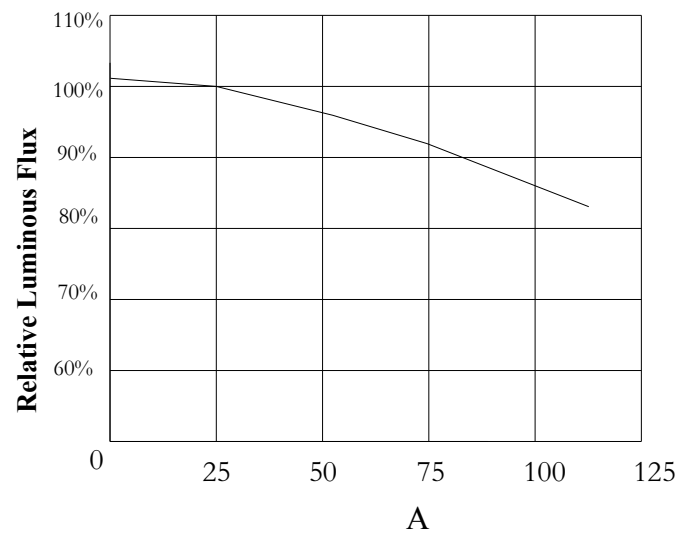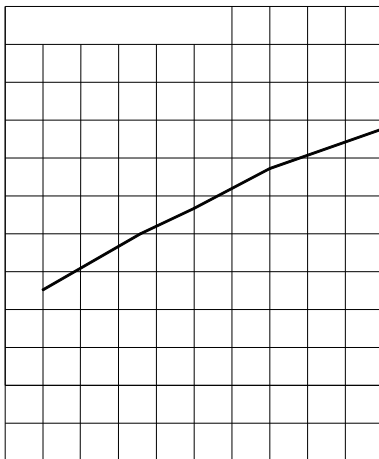



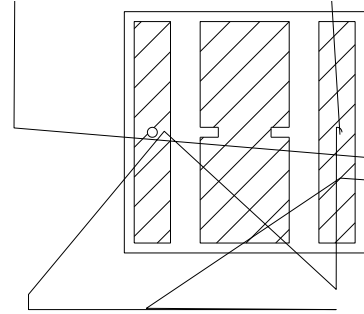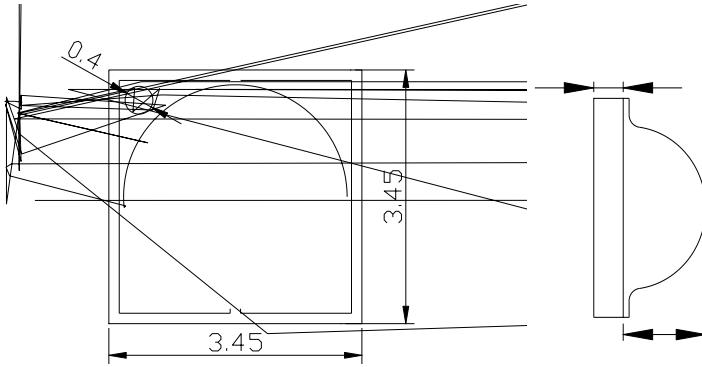

±

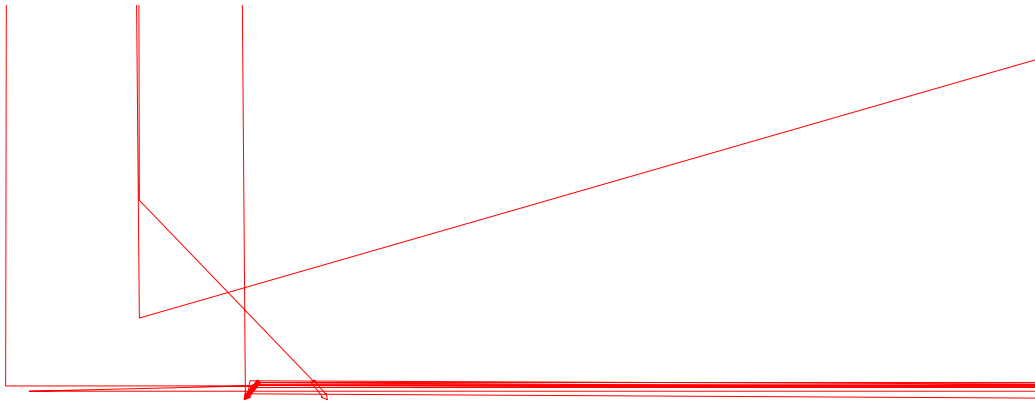



HONGLITRONIC
鸿利光电

:

Φ



HONGLITRONIC
鸿利光电

RoHS

TYPE:

QTY:

VF:

XY:

ΦV:

IF:



TC:

DATE:


LOT.NO:




(1) Reel package (1000 pcs/reel)

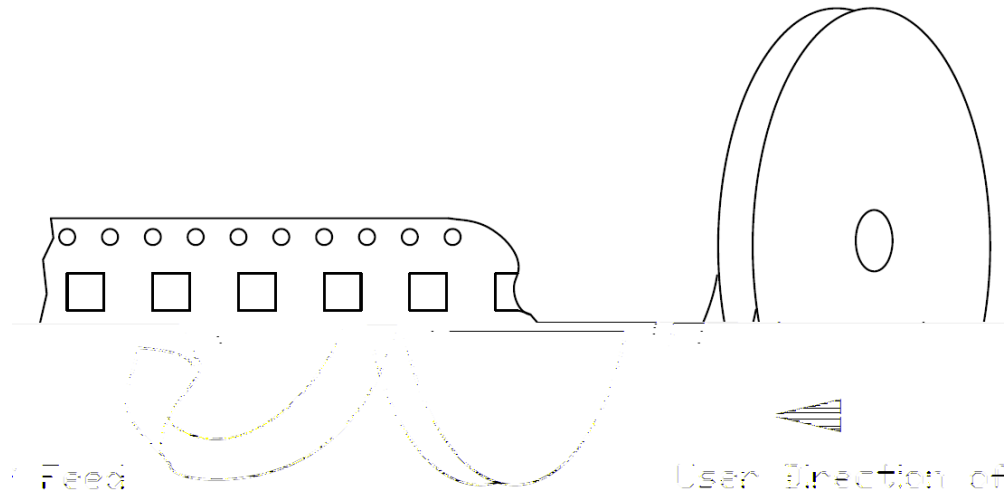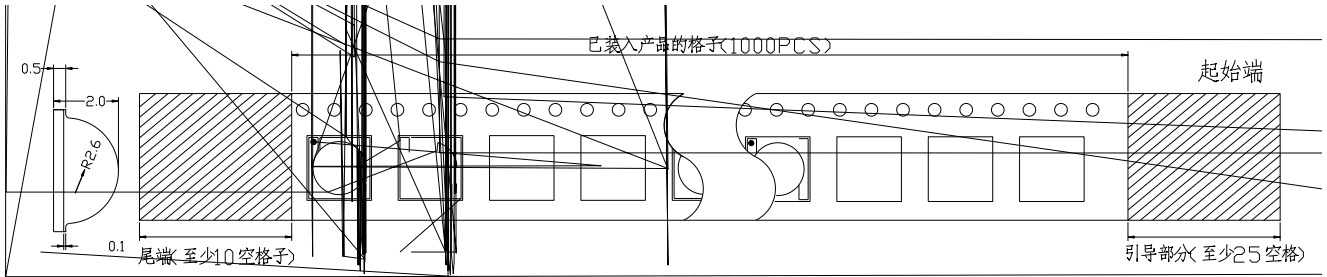

(2) Moisture resistant packaging

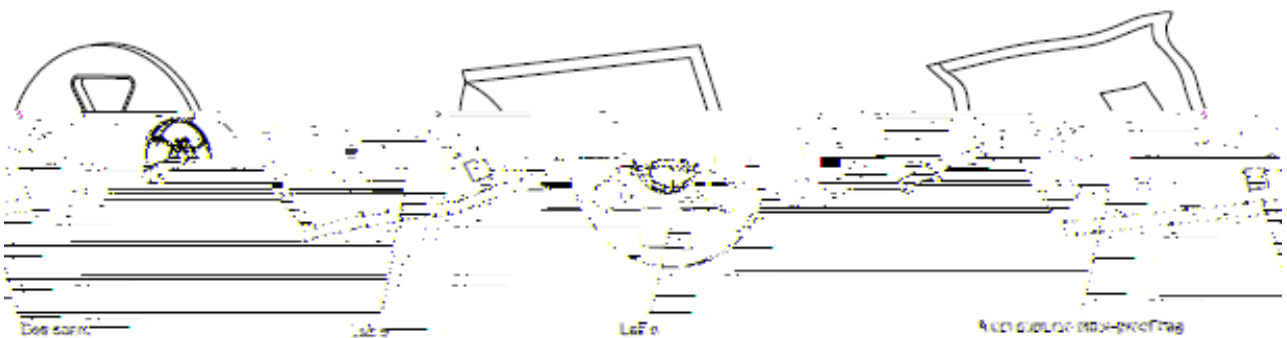




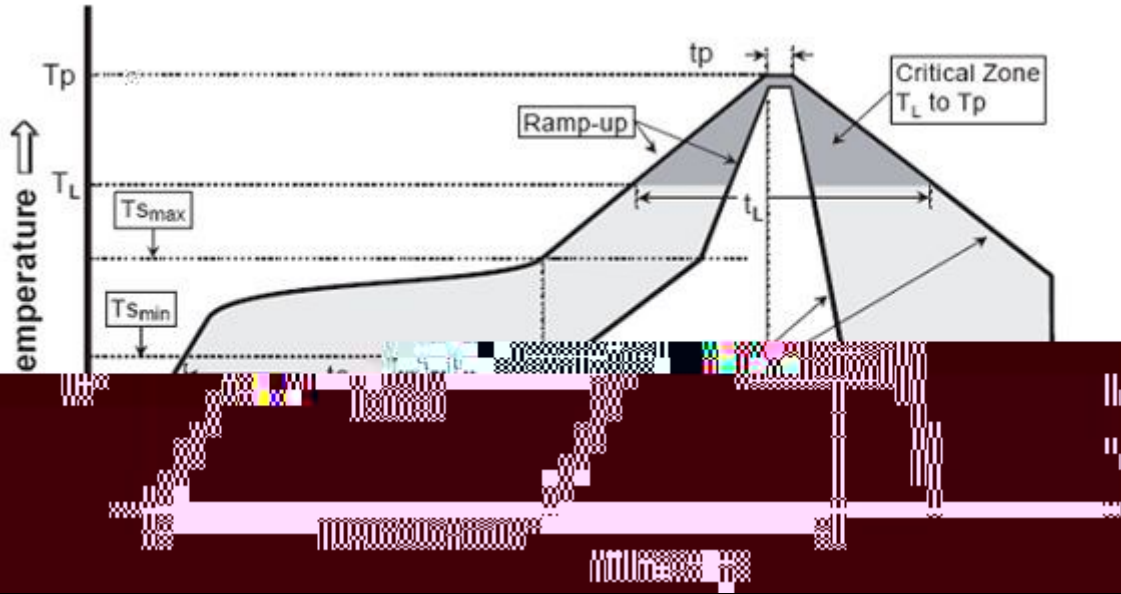

Note:

/5. +/6.





(

(

##

##

##

##

N

+

+


⊕

⊕


A0 0 L 1 M LM

-

, , A0 0 L 1 M LM ,

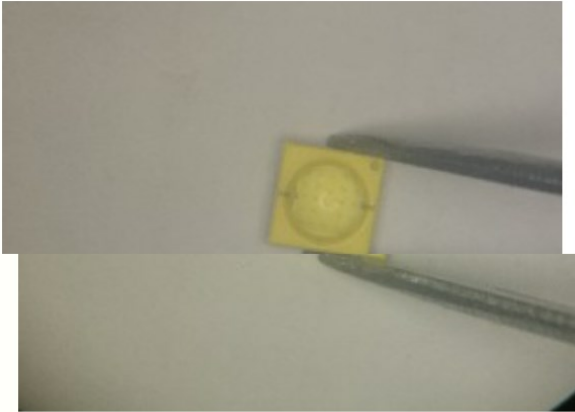

OK

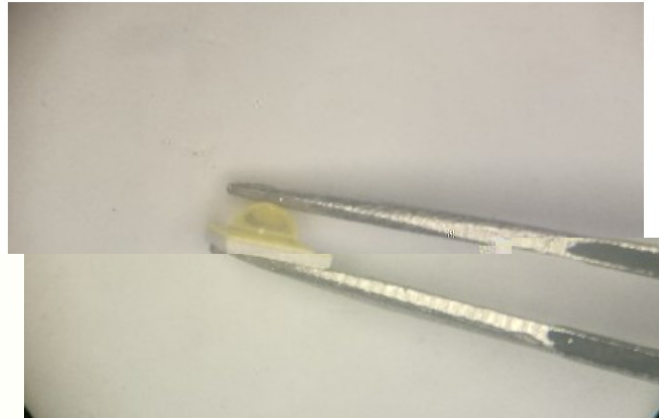

NG

