

<b>TEST REPORT</b> <b>IEC 62471:2006</b> <b>Photobiological safety of lamps and lamp systems</b>	
Report reference No .....	RSZ150706554-03M1
Compiled by (+ signature) .....	Colin Zhang
Approved by (+ signature) .....	Alice Liu
Date of issue .....	2015-07-09
Testing laboratory .....	Bay Area Compliance Laboratories Corp. (Dongguan)
Address .....	No.69 Pulong Village Puxinhu Industry Zone Tangxia,Dongguan, China.
Testing location .....	Same as above
Applicant .....	Guangzhou Hongli Opto-Electronic Co., Ltd.
Address .....	No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China
Standard .....	IEC 62471:2006
Test sample(s) received.....	2015-07-07
Test in period.....	2015-07-08
Procedure deviation .....	N.A.
Non-standard test method .....	N.A.

This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Ba

Manufacturer.....	Guangzhou Hongli Opto-Electronic Co., Ltd. No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China
Rating .....	240mA
Copy of marking plate: N/A	

<b>Test item particulars .....</b>	
Tested lamp.....	LED
Tested lamp system.....	N/A
<b>Lamp classification group.....: Exempt Group</b>	
Lamp cap.....	N/A
Bulb.....	N/A
Rated of the lamp .....	N/A
Furthermore marking on the lamp.....	N.A.
Seasoning of lamps according EN standard .....	No seasoning
Used measurement instrument.....	See appendix B for details
Temperature by measurement.....	25.3°C
Information for safety use.....	N.A

<b>Possible test case verdicts:</b>	
-test case does not apply to the test object.....	N(.A.)
-test object does meet the requirement.....	P(ass)
-test object does not meet the requirement.....	F(ail)

<b>General remarks:</b>
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a point is used as the decimal separator. List of test equipment must be kept on file and available for review.
This report consists of 18 pages and following appendices: Appendix A EUT photos Appendix B Test equipment list Appendix C DECLARATION OF DIFFERENCES
Note: This report is based on RSZ150706554-03, the amendment is just change the blue light(small source) emission limits.



4	EXPOSURE LIMITS		P
4.1	General		P
	The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure		P
	Detailed spectral data of a light source are generally required only if the luminance of the source exceeds $10^4 \text{ cd m}^{-2}$	$>10^4 \text{ cd m}^{-2}$	P
4.3	Hazard exposure limits		P
4.3.1	Actinic UV hazard exposure limit for the skin and eye		P
	The exposure limit for effective radiant exposure is $30 \text{ J}\cdot\text{m}^{-2}$ within any 8-hour period		P
	To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance, $E_s$ , of the light source shall not exceed the levels defined by:	$E_s=7.2\times 10^{-6} \text{ W}\cdot\text{m}^{-2}$	P
	$E_s \cdot t = \int_{200}^{400} E(\lambda, t) \cdot S_{uv}(\lambda) \cdot t \cdot \lambda \leq 30 \text{ J}\cdot\text{m}^{-2}$		P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by:		P
	$t_{\max} = 30/E_s$	$t_{\max} = 30/(7.2 \times 10^{-6}) = 4.17 \times 10^6 \text{ s}$	P
4.3.2	Near-UV hazard exposure limit for eye		P
	For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed $10000 \text{ J}\cdot\text{m}^{-2}$ for exposure times less than 1000s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, $E_{UVA}$ , shall not exceed $10 \text{ W}\cdot\text{m}^{-2}$	$E_{UVA} = 5.3 \times 10^{-4} \text{ W}\cdot\text{m}^{-2}$	P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by:		N
	$t_{\max} = 10000/E_{UVA} \text{ s}$		N
4.3.3	Retinal blue light hazard exposure limit		P
	To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral radiance of the light source weighted against the blue-light hazard function, $B(\lambda)$ , i.e., the blue-light weighted radiance, $L_B$ , shall not exceed the levels defined by:		P
	$L_B \cdot t = \int_{300}^{700} L(\lambda, t) \cdot B(\lambda) \cdot t \cdot \lambda \leq 10^6 \text{ J}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$		N



	$E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta\lambda \leq 100$	$W \cdot m^{-2}$	$E_{IR} = 0 W \cdot m^{-2}$	P
4.3.8	Thermal hazard exposure limit for the skin			P
	Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to:			P
	$E_H \cdot t = \sum_{380}^{3000} \sum_t E_{\lambda}(\lambda, t) \cdot \Delta t \cdot \Delta\lambda \leq 20000 \cdot t^{0,25}$	$J \cdot m^{-2}$	$E_H = 0 J \cdot m^{-2}$	P

5	MEASUREMENT OF LAMPS AND LAMP SYSTEMS			P
5.1	Measurement conditions			P
	Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification.			P
5.1.1	Lamp ageing (seasoning)			N
	Seasoning of lamps shall be done as stated in the Appropriate EN lamp standard.			N
5.1.2	Test environment	25.3		-
	For specific test conditions, see the appropriate EN lamp standard or in absence of such standards, the appropriate national standards or manufacturer's recommendations.			-
5.1.3	Extraneous radiation			P
	Careful checks should be made to ensure that extraneous sources of radiation and reflections do not add significantly to the measurement results.			P
5.1.4	Lamp operation			P
	Operation of the test lamp shall be provided in accordance with:			P
	– the appropriate EN lamp standard, or			N
	– the manufacturer's recommendation			P
5.1.5	Lamp system operation			N
	The power source for operation of the test lamp shall be provided in accordance with:			N
	– the appropriate EN standard, or			N
	– the manufacturer's recommendation			N
5.2	Measurement procedure			P
5.2.1	Irradiance measurements			P
	Minimum aperture diameter 7mm.			P
	Maximum aperture diameter 50 mm.			P
	The measurement shall be made in that position of the beam giving the maximum reading.			P

	The measurement instrument is adequate calibrated.	See appendix B	P
5.2.2	Radiance measurements		P
5.2.2.1	Standard method		P
	The measurements made with an optical system.		P
	The instrument shall be calibrated to read in absolute radiant power per unit receiving area and per unit solid angle to acceptance averaged over the field of view of the instrument.		P
5.2.2.2	Alternative method		N
	Alternatively to an imaging radiance set-up, an irradiance measurement set-up with a circular field stop placed at the source can be used to perform radiance measurements.		N
5.2.3	Measurement of source size		P
	The determination of $\theta$ , the angle subtended by a source, requires the determination of the 50% emission points of the source.		P
5.2.4	Pulse width measurement for pulsed sources		N
	The determination of $t$ , the nominal pulse duration of a source, requires the determination of the time during which the emission is > 50% of its peak value.		N
5.3	Analysis methods		P
5.3.1	Weighting curve interpolations		N
	To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired.		N
5.3.2	Calculations		P
	The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy.		P
5.3.3	Measurement uncertainty		P
	The quality of all measurement results must be quantified by an analysis of the uncertainty.		P
6	LAMP CLASSIFICATION		P
	For the purposes of this standard it was decided that the values shall be reported as follows:		P
	– for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm	LED light for general lighting: 200 mm	P
	– for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm		N
6.1	Continuous wave lamps		P
6.1.1	Exempt Group		P





	The risk group determination of the lamp being tested shall be made as follows:		N
	– a lamp that exceeds the exposure limit shall be classified as belonging to Risk Group 3 (High-Risk)		N
	– for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group – for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance		N

FINAL

<b>Table 4.1</b>		Spectral weighting function for assessing ultraviolet hazards for skin and eye		-
<b>Wavelength<sup>1</sup> λ, nm</b>	<b>UV hazard function S<sub>uv</sub>(λ)</b>	<b>Wavelength λ, nm</b>	<b>UV hazard function S<sub>uv</sub>(λ)</b>	
200	0,030	313*	0,006	
205	0,051	315	0,003	
210	0,075	316	0,0024	
215	0,095	317	0,0020	
220	0,120	318	0,0016	
225	0,150	319	0,0012	
230	0,190	320	0,0010	
235	0,240	322	0,00067	
240	0,300	323	0,00054	
245	0,360	325	0,00050	
250	0,430	328	0,00044	
254*	0,500	330	0,00041	
255	0,520	333*	0,00037	
260	0,650	335	0,00034	
265	0,810	340	0,00028	
270	1,000	345	0,00024	
275	0,960	350	0,00020	
280*	0,880	355	0,00016	
285	0,770	360	0,00013	
290	0,640	365*	0,00011	
295	0,540	370	0,000093	
297*	0,460	375	0,000077	
300	0,300	380	0,000064	
303*	0,120	385	0,000053	
305	0,060	390	0,000044	
308	0,026	395	0,000036	
310	0,015	400	0,000030	

<sup>1</sup> Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths.  
\* Emission lines of a mercury discharge spectrum.



470	0,62	6,2
475	0,55	5,5
480	0,45	4,5
485	0,40	4,0
490	0,22	2,2
495	0,16	1,6
500-600	$10^{[(450- )/50]}$	1,0
600-700	0,001	1,0
700-1050	0,013	$10^{[(700- )/500]}$
1050-1150	0,025	0,2
1150-1200	0,05	$0,2^{100.02(1150- )}$
1200-1400	0,10	0,02
<p>* 1 Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths. * Emission lines of a mercury discharge spectrum.</p>		

<b>Table 5.4</b>		Summary of the ELs for the surface of the skin or cornea (irradiance based values)			-
<b>Hazard Name</b>	<b>Relevant equation</b>	<b>Wavelength Range nm</b>	<b>Exposure aperture rad(deg)</b>	<b>Limiting aperture rad(deg)</b>	<b>EL in items of constant irradiance W.m<sup>-2</sup></b>
Actinic UV skin & eye	$E_s = E \cdot S(\cdot)$	200 – 400	< 30000	1,4 (80)	30/t
Eye UV-A	$E_{UVA} = E \cdot \cdot$	315 – 400	1000 >1000	1,4 (80)	10000/t 10
Blue-light small source	$E_B = E \cdot B(\cdot)$	300 – 700	100 >100	< 0,011	100/t 1,0
Eye IR	$E_{IR} = E \cdot \cdot$	780 – 3000	1000 >1000	1,4 (80)	18000/t <sup>0,75</sup> 100
Skin thermal	$E_H = E \cdot \cdot$	380 – 3000	< 10	2 sr	20000/t <sup>0,75</sup>


<b>Table 5.5</b>		Summary of the ELs for the retina (radiance based values)			-
<b>Hazard Name</b>	<b>Relevant equation</b>	<b>Wavelength Range nm</b>	<b>Exposure duration Sec</b>	<b>Field of view radians</b>	<b>EL in terms of constant radiance W.m<sup>-2</sup>.sr<sup>-1</sup></b>
Blue light	$L_B = L \cdot B(\cdot) \cdot$	300 – 700	0,25 – 10 10-100 100-10000 10000	0,011• (t/10) 0,011 0,0011• t 0,1	10 <sup>6</sup> /t 10 <sup>6</sup> /t 10 <sup>6</sup> /t 100
Retinal thermal	$L_R = L \cdot R(\cdot) \cdot$	380 – 1400	< 0,25 0,25 – 10	0,0017 0,011• (t/10)	50000/(•t <sup>0,25</sup> ) 50000/(•t <sup>0,25</sup> )
Retinal thermal (weak visual stimulus)	$L_{IR} = L \cdot R(\cdot) \cdot$	780 – 1400	> 10	0,011	6000/

Table 6.1		Emission limits for risk groups of continuous wave lamps base on Directive(2006/25/EC)								P
Risk	Action spectrum	Units	Symbol	Exempt		Low risk		Mod risk		
				Limit	Result	Limit	Result	Limit	Result	
Actinic UV	Suv( )	W.m <sup>-2</sup>	E <sub>S</sub>	0.001	7.2×10 <sup>-6</sup>	0.003	-	0.03	-	
Near UV		W.m <sup>-2</sup>	E <sub>UVA</sub>	10	5.3×10 <sup>-4</sup>	33	-	100	-	
Blue light	B( )	W.m <sup>-2</sup> .sr <sup>-1</sup>	L <sub>B</sub>	100	94	10000	-	4000000	-	
Blue light,small source	B( )	W.m <sup>-2</sup>	E <sub>B</sub>	1*	0.64	1	-	400	-	
Retinal thermal	R( )	W.m <sup>-2</sup> .sr <sup>-1</sup>	L <sub>R</sub>	28000/ =0.0045	8.5×10 <sup>4</sup>	28000/ =0.0045	-	71000/ =0.0045	-	
Retinal thermal, Weak visual stimulus**	R( )	W.m <sup>-2</sup> .sr <sup>-1</sup>	L <sub>IR</sub>	6000/ =0.0045	2.8×10 <sup>2</sup>	6000/ =0.0045	-	28000/ =0.0045	-	
IR radiation Eye		W.m <sup>-2</sup>	E <sub>IR</sub>	100	0	570	-	3200	-	

\* Small source defined as one with < 0,011 radian. Averaging field of view at 10000 s is 0,1 radian.  
\*\* Involves evaluation of non-GLS source

## Appendix I Figure of Spectral distribution


Spectral distribution of P2835W1D4-D01-8D1A01



FENY

## Appendix A - EUT Photos

### 1. General view of P2835W1D4-D01-8D1A01

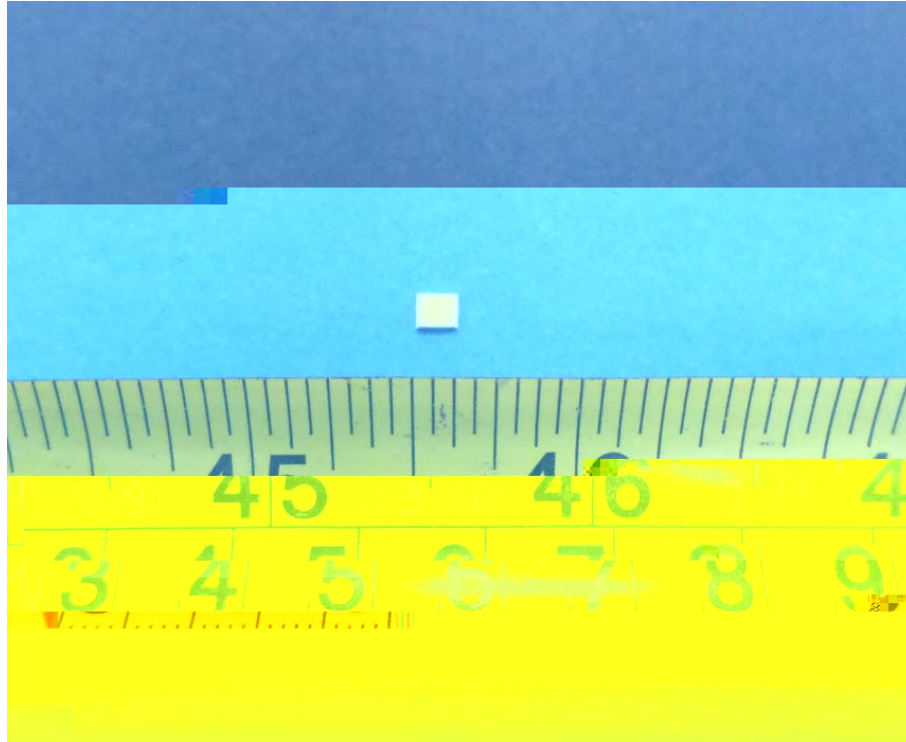



### Appendix B Test equipment list

Equipment Description	Model No	BACL#	Manufacturer	Last Cal	Cal Due
UV light leakage spectrum of biological safety systems	PMS-300	T-08-EE042	EVERFINE	2015-3-25	2016-3-24
Standard power spectral UV radiation-specific	UVS-8003	T-08-EE048	EVERFINE	2014-8-2	2015-8-2
80mm sample integrating sphere	SMS-300	T-08-EE055	EVERFINE	2015-3-25	2016-3-24
Radio meter	RD-2000	T-08-EE056	EVERFINE	2015-3-25	2016-3-24
high-accuracy digital photometer head	HAAS-2000	T-08-EE058	EVERFINE	2015-3-25	2016-3-24
Hygrothermograph	PWS280	T-08-QA026	N/A	2013-4-1	2016-3-30
Steel tape	HILOCK-19	T-08-SF100	TAJIMA	2013-4-18	2018-4-17

## Appendix C DECLARATION OF DIFFERENCES



广州市鸿利光电股份有限公司

### Difference Declaration

We, Guangzhou Hongli Opto-Electronic Co.,Ltd., hereby declare that products: P2835W1D4-D01-8D1A01, P2835W2D4-D01-8D1A01, P2835W3D4-D01-8D1A01, P2835W4D4-D01-8D1A01, P2835W5D4-D01-8D1A01, P2835W6D4-D01-8D1A01 are electrically identical with the same PCB LAYOUT and circuit as model: P2835W6D4-D01-8D1A01 tested by BACL, the only differences between those models are the Model Name, and CCT.

All the family model numbers and differences are as follows:

Model Number	CCT
2835W1D4-D01-8D1A01	2700
2835W2D4-D01-8D1A01	3000
2835W3D4-D01-8D1A01	4000
2835W4D4-D01-8D1A01	5000
2835W5D4-D01-8D1A01	6000
2835W6D4-D01-8D1A01	6500

Thank you!

July 1, 2015

Sincerely,

Signature: *Becky Yang*

Name: Becky Yang

Environmental Management System Supervisor



Thank you!

July 1, 2015

Sincerely,

Signature:

Printed Name:

Title: