



Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-LC2824H466W-80B18C18(Ra4)-S

Report Type: 7000 Hours Test Report	Product Type: LED Module
Reviewed By: Pote Wang	
Report Number: SZ2220402-12239E-10-7000	
Test Date: 2022-04-10 to 2023-02-16	
Report Date: 2023-03-08	
Approved by: Blake Zhang / EEE Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 5/F(B-West)-7/F, the 3rd Phase of Wan Li Industrial Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China. Tel: +86755-33320018 Fax: +86755-33320008
Test Facility:	Test facility was located at No.12, Pulong East Road, Tangxia Town, Dongguan, Guangdong, China.

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Shenzhen). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.



1 - General Information

1.1 Description of LED Light Sources

Sample Size:

24 PCS test samples were in good condition and received on 2022-04-02. The samples were numbered from 1 to 12 and 13 to 24.

Manufacturer: Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
 Part Number: HL-LC2824H466W-80B18C18(Ra4)-S
 Part Type: LED Module
 Drive Level: DC 2700mA
 Nominal CCT: 2700K
 Power: 149.58W
 Average Current Density per LED die: 1033.335mA/mm²
 Average Power Density per LED die: 3.100W/mm²
 CRI: 90
 Die Spacing: 0.28mm

Sampling Method :

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.
 These manufacturing lots are picked to represent a wide parametric distribution.

Family products covered by this report:

According to *ENERGY STAR® Requirements for the Use of LM-80 Data*, the following products can be covered by this report base on the information and declaration provided by manufacturer. The information of these models shows that the covered products meet all section 4 requirements of *ENERGY STAR® Requirements for the Use of LM-80 Data* (September 28, 2017)

This report covers the following models:

Model type	Model name	CRI (typ.)	CCT (typ.)	Series	Parallel	Power density W/mm ²	Current density per LED die mA/mm ²	Current per die (mA)	Distance between of dies (mm)	Current (mA)
Test model	HL-LC2824H466W-80B18C18(Ra4)-S	90	2700K	18	18	0.1946	1033.335	150	0.28	2700
Multiple models	HL-LC2824H466W-80B18C18(Ra4)-S	90	2200K~6500K	18	18	0.1946	1033.335	150	0.28	2700
Multiple models	HL-LC055H384W-5B2C12(Ra4)-S	90	2200K~6500K	12	2	0.0593	775.002	150	0.96	300
Multiple models	HL-LC055H384W-9B4C12(Ra4)-S	90	2200K~6500K	12	4	0.1185	775.002	150	0.54	600
Multiple models	HL-LC055D4W-5B2C12(Ra4)-S	90	2200K~6500K	12	2	0.0593	516.668	150	0.91	300
Multiple models	HL-LC055D4W-9B4C12(Ra4)-S	90	2200K~6500K	12	4	0.1185	516.668	150	0.42	600
Multiple models	HL-LC055H9VW-5B4C6(Ra4)	90	2200K~6500K	6	4	0.0474	246.032	40	1.02	160
Multiple models	HL-LC055DV35W-10B3C8(Ra4)-S	90	2200K~6500K	8	3	0.0711	300.001	60	0.57	180
Multiple models	HL-LC055DV35W-16B4C12(Ra4)-S	90	2200K~6500K	12	4	0.1422	300.001	60	0.44	240
Multiple models	HL-LC1306D4W-3B1C12(Ra4)-S	90	2200K~6500K	12	1	0.0296	516.668	150	0.29	150

Model type	Model name	CRI (typ.)	CCT (typ.)	Series	Parallel	Power density W/mm ²	Current density per LED die mA/mm ²	Current per die (mA)	Distance between of dies (mm)	Current (mA)
Multiple models	HL-LC1808D4W-5B2C12(Ra4)-S	90	2200K~6500K	12	2	0.0339	516.668	150	0.30	300
Multiple models	HL-LC1810D4W-9B4C12(Ra4)-S	90	2200K~6500K	12	4	0.0678	516.668	150	0.38	600
Multiple models	HL-LC2009H384W-10B2C12(Ra4)-S	90	2200K~6500K	12	2	0.0343	775.002	150	0.55	300
Multiple models	HL-LC2009D4W-7B1C14(Ra4)-S	90	2200K~6500K	14	1	0.0199	516.668	150	0.79	150
Multiple models	HL-LC2009D4W-9B1C18(Ra4)-S	90	2200K~6500K	18	1	0.0257	516.668	150	0.59	150
Multiple models	HL-LC2009D4W-10B1C20(Ra4)-S	90	2200K~6500K	20	1	0.0286	516.668	150	0.59	150
Multiple models	HL-LC2009D4W-12B1C24(Ra4)-S	90	2200K~6500K	24	1	0.0343	516.668	150	0.50	150
Multiple models	HL-LC2009D4W-7B1C26(Ra4)-S	90	2200K~6500K	26	1	0.0371	516.668	150	0.33	150
Multiple models	HL-LC2009D4W-15B1C30(Ra4)-S	90	2200K~6500K	30	1	0.0428	516.668	150	0.40	150
Multiple models	HL-LC2009D4W-18B1C36(Ra4)-S	90	2200K~6500K	36	1	0.0514	516.668	150	0.30	150
Multiple models	HL-LC2009D4W-20B1C40(Ra4)-S	90	2200K~6500K	40	1	0.0571	516.668	150	0.29	150
Multiple models	HL-LC2009D4W-10B2C12(Ra4)-S	90	2200K~6500K	12	2	0.0343	516.668	150	0.50	300
Multiple models	HL-LC2009D4W-20B2C20(Ra4)-S	90	2200K~6500K	20	2	0.0571	516.668	150	0.29	300
Multiple models	HL-LC2009DV35W-10B3C8(Ra4)-S	90	2200K~6500K	8	3	0.0412	300.001	60	0.33	180
Multiple models	HL-LC2309D4W-12B1C24(Ra4)-S	90	2200K~6500K	24	1	0.0263	516.668	150	0.42	150
Multiple models	HL-LC2611H384W-20B2C24(Ra4)-S	90	2200K~6500K	24	2	0.0489	775.002	150	0.63	300
Multiple models	HL-LC2611D4W-13B1C26(Ra4)-S	90	2200K~6500K	26	1	0.0265	516.668	150	0.52	150
Multiple models	HL-LC2611D4W-15B1C30(Ra4)-S	90	2200K~6500K	30	1	0.0306	516.668	150	0.49	150
Multiple models	HL-LC2611D4W-18B1C36(Ra4)-S	90	2200K~6500K	36	1	0.0367	516.668	150	0.30	150
Multiple models	HL-LC2611D4W-22B1C44(Ra4)-S	90	2200K~6500K	44	1	0.0448	516.668	150	0.30	150
Multiple models	HL-LC2611D4W-20B1C50(Ra4)-S	90	2200K~6500K	50	1	0.0509	516.668	150	0.47	150
Multiple models	HL-LC2611D4W-24B1C54(Ra4)-S	90	2200K~6500K	54	1	0.0550	516.668	150	0.47	150
Multiple models	HL-LC2611D4W-27B1C60(Ra4)-S	90	2200K~6500K	60	1	0.0611	516.668	150	0.33	150
Multiple models	HL-LC2611D4W-24B1C62(Ra4)-S	90	2200K~6500K	62	1	0.0632	516.668	150	0.33	150
Multiple models	HL-LC2611D90W-18B1C36(Ra4)-S	90	2200K~6500K	36	1	0.0367	301.949	150	0.35	150

Model type	Model name	CRI (typ.)	CCT (typ.)	Series	Parallel	Power density W/mm ²	Current density per LED die mA/mm ²	Current per die (mA)	Distance between of dies (mm)	Current (mA)
Multiple models	HL-LC2611D4W-24B2C26(Ra4)-S	90	2200K~6500K	26	2	0.0530	516.668	150	0.47	300
Multiple models	HL-LC2611D4W-27B2C30(Ra4)-S	90	2200K~6500K	30	2	0.0611	516.668	150	0.33	300
Multiple models	HL-LC2611D4W-16B3C12(Ra4)-S	90	2200K~6500K	12	3	0.0367	516.668	150	0.43	450
Multiple models	HL-LC2611DV35W-10B3C8(Ra4)-S	90	2200K~6500K	8	3	0.0293	300.001	60	0.63	180
Multiple models	HL-LC2614D4W-30B1C60(Ra4)-S	90	2200K~6500K	60	1	0.0611	516.668	150	0.64	150
Multiple models	HL-LC2614D4W-30B1C62(Ra4)-S	90	2200K~6500K	62	1	0.0632	516.668	150	0.34	150
Multiple models	HL-LC2614D4W-40B1C74(Ra4)-S	90	2200K~6500K	74	1	0.0754	516.668	150	0.40	150
Multiple models	HL-LC2614D90W-30B1C62(Ra4)-S	90	2200K~6500K	62	1	0.0632	516.668	150	0.33	150
Multiple models	HL-LC2614D4W-30B2C30(Ra4)-S	90	2200K~6500K	30	2	0.0611	516.668	150	0.64	300
Multiple models	HL-LC2614D4W-36B2C36(Ra4)-S	90	2200K~6500K	36	2	0.0734	516.668	150	0.53	300
Multiple models	HL-LC2614D4W-32B2C39(Ra4)-S	90	2200K~6500K	39	2	0.0795	516.668	150	0.46	300
Multiple models	HL-LC2614D4W-40B2C46(Ra4)-S	90	2200K~6500K	46	2	0.0938	516.668	150	0.42	300
Multiple models	HL-LC2614D4W-40B2C54(Ra4)-S	90	2200K~6500K	54	2	0.1101	516.668	150	0.31	300
Multiple models	HL-LC2614D4W-40B3C32(Ra4)-S	90	2200K~6500K	32	3	0.0979	516.668	150	0.42	450
Multiple models	HL-LC2614D4W-30B6C12(Ra4)-S	90	2200K~6500K	12	6	0.0734	516.668	150	0.42	900
Multiple models	HL-LC2614D4W-50B9C12(Ra4)-S	90	2200K~6500K	12	9	0.1101	516.668	150	0.31	1350
Multiple models	HL-LC2614D90W-30B1C62(Ra4)-S	90	2200K~6500K	62	1	0.0632	301.949	150	0.33	150
Multiple models	HL-LC2614D90W-36B2C36(Ra4)-S	90	2200K~6500K	36	2	0.0734	301.949	150	0.40	300
Multiple models	HL-LC2614D90W-40B2C46(Ra4)-S	90	2200K~6500K	46	2	0.0938	301.949	150	0.29	300
Multiple models	HL-LC2614D90W-40B2C54(Ra4)-S	90	2200K~6500K	54	2	0.1101	301.949	150	0.28	300
Multiple models	HL-LC2614D90W-40B3C36(Ra4)-S	90	2200K~6500K	36	3	0.1101	301.949	150	0.28	450

1.2 Standards and Reference Documentations

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- *CIE 127:2007: Measurement of LEDs (This standard was not accredited by NVLAP)
- *ENERGY STAR® Requirements for the Use of LM-80 Data (This standard was not accredited by NVLAP)

1.3 Testing Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
1.0m integrating sphere	SENSING	SCD-20008	N/A	2022-09-27	2023-09-26
spectroradiometer	SENSING	SCD-20008	N/A	2022-09-27	2023-09-26
DC Power Supply	Hanshenpuyuan	HSPY-100-05	2013010210003	2022-11-18	2023-11-17
Standard Light Source	EVERFINE	D204	N/A	2021-10-15	2023-10-14
DC Power Supply	BACL	B25001	90020	2022-11-18	2023-11-17
Multilayer aging machine	BACL	B3-900	20030	2022-11-18	2023-11-17
Programmable D.C. Power Supply	Xinnuoer	ATP-5005	N/A	2022-11-18	2023-11-17
Programmable D.C. Power Supply	Xinnuoer	ATP-5005	N/A	2022-11-18	2023-11-17

1.4 Drive Level

Samples are driven with a constant direct current (DC) during maintenance test, photometric and electrical measurement. The current value was regulated to within $\pm 3\%$ of the specified value of the manufacturer during maintenance test, and was within $\pm 0.5\%$ during photometric and electrical measurement test.

1.5 Ambient Conditions for Maintenance Test

For lumen maintenance test, samples within one data set, were installed on cooling boards in thermal chambers with minimal ambient airflow. The case temperature and ambient temperature was monitored by thermocouples which one was soldered to the coldest DUTs' case (TMP_{LED}) location, while the other is mounted at a distance of 5 mm above the TMP location.

During life testing, TMP_{LED} of the coldest LEDs were maintained at a temperature that was greater than or equal to 2°C below the corresponding nominal case temperature. Surrounding air was maintained at a temperature that was greater than or equal to 5°C below the corresponding nominal case temperature. Thermocouples were shielded from direct DUT optical radiation and comply with ASTM E230 Table 1 "Special Limits".

Samples were connected to DC power supply in series circuits with a constant current. The forward current was regulated to within $\pm 3\%$ of the specified value of the manufacturer.

The relative humidity within chamber was kept less than 65% during test.

For photometry measurement, the ambient temperature during test was set to 25°C \pm 2°C, RH <65 %.

1.6 Photometric Measurement Method and Uncertainty

Integrating sphere and spectroradiometer is used to measure luminous flux and chromaticity coordinate u'v'. 2 measurement was used and sample was driven by DC power supply. The forward current was regulated to within $\pm 0.5\%$ of the nominal value. The test system was calibrated by halogen reference lamp. The ambient temperature during test was set to 25°C \pm 2°C, RH <65% . The temperature measurement point was located in the sphere and the temperature was detected by a temperature probe.

The uncertainty of the light output measurements is U=1.59% (K=2), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is U=21K (K=2), at the 95% confidence level.

The uncertainty of the temperature is U=0.8671°C (K=2), at the 95% confidence level.

1.7 Statement of Traceability

Bay Area Compliance Laboratories Corp. (Shenzhen) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).



1.8 Sample Set

Data Set 1: 55°C, 2700mA

Part Number: HL-LC2824H466W-80B18C18(Ra4)-S

Number of Units: 12

Case Temperature: >53°C

Ambient Temperature: >50°C

Life Test Drive Current: 2700mA

Measurement Current: 2700mA

Data Set 2: 105°C, 2700mA

Part Number: HL-LC2824H466W-80B18C18(Ra4)-S

Number of Units: 12

Case Temperature: >103°C

Ambient Temperature: >100°C

Life Test Drive Current: 2700mA

Measurement Current: 2700mA



2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration	α	β	Reported TM -21 L ₇₀ Lifetime	Reported TM -21 L ₉₀ Lifetime
1	12	0	1000hrs	7000hrs	2.564E-06	1.001	>39000 hours	>39000 hours
2	12	0	1000hrs	7000hrs	3.023E-06	0.998	>39000 hours	34000 hours



3 - Test Data


3.1 Data Set 1, 55C, 2700mA (Lumen Maintenance)

No.	(lm)	Lumen Maintenance (%)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs
1	11528.00	99.72	99.64	99.51	99.30	98.95	98.81	98.46
2	11822.00	99.91	99.73	99.28	99.07	98.93	98.64	98.49
3	11506.00	99.63	99.44	99.12	98.72	98.42	98.13	97.92
4	11499.00	99.82	99.59	99.13	98.84	98.56	98.41	98.12



3.3 Data Set 1, 55°C , 2700mA (Chromaticity Shift) 2763 0.0009 0.0009

No.	u'	v'	CCT(K)	Chromaticity Shift (u'v')								
				0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	
0.2589	0.2589	0.5303	2763	0.0004	0.0008	0.0009					5	8





3.4 Data Set 2, 105°C , 2700mA (Lumen Maintenance)

No.	(lm)	Lumen Maintenance (%)						
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs
13	11342.00	99.72	99.33	98.97	98.65	98.26	97.92	97.62
14	11586.00	99.64	99.30	99.05	98.75	98.53	98.25	97.98
15	11592.00	99.81	99.12	98.91	98.62	98.35	98.15	97.85
16	11577.00	99.53	99.14	98.72	98.38	98.00	97.69	97.39
17	11645.00	99.61	99.33	99.07	98.77	98.51	98.15	97.93
18	11576.00	99.35	98.91	98.70	98.34	98.13	97.76	97.48
19	11453.00	99.53	99.26	98.92	98.66	98.43	98.22	97.79
20	11056.00	99.53	99.20	99.10	98.87	98.63	98.17	97.75
21	11425.00	99.91	99.55	99.08	98.65	98.37	98.23	97.80
22	11488.00	99.91	99.27	99.07	98.72	98.50	98.29	97.93
23	11385.00	99.63	99.36	99.01	98.78	98.49	98.13	97.85
24	11386.00	99.43	99.13	98.83	98.52	98.13	97.81	97.52
Avg.	11459.25	99.63	99.24	98.95	98.64	98.36	98.07	97.74
Med.	11470.50	99.62	99.26	98.99	98.66	98.40	98.15	97.80
st dev	160.95	0.1777	0.1595	0.1391	0.1604	0.1942	0.2087	0.1936
Min.	11056.00	99.35	98.91	98.70	98.34	98.00	97.69	97.39
Max.	11645.00							




3.6 Data Set 2, 105°C , 2700mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift (u'v')						
	0hr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs
13	0.2576	0.5289	2798	0.0001	0.0003	0.0005	0.0006	0.0007	0.0008	0.0010
14	0.2583	0.5281	2787	0.0003	0.0006	0.0008	0.0009	0.0011	0.0012	0.0013
15	0.2591	0.5288	2764	0.0001	0.0003	0.0005	0.0008	0.0009	0.0012	0.0014
16	0.2580	0.5277	2794	0.0005	0.0006	0.0008	0.0010	0.0012	0.0014	0.0014
17	0.2583	0.5289	2783	0.0005	0.0007	0.0009	0.0012	0.0014	0.0016	0.0019


4 - DUT Photo

4.1 Mechanical Dimensions

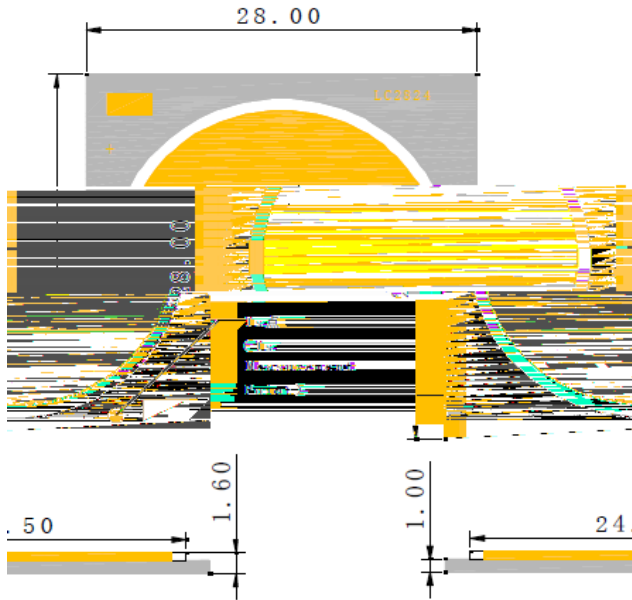

All dimensions are in millimeter

4.2 DUT Photo

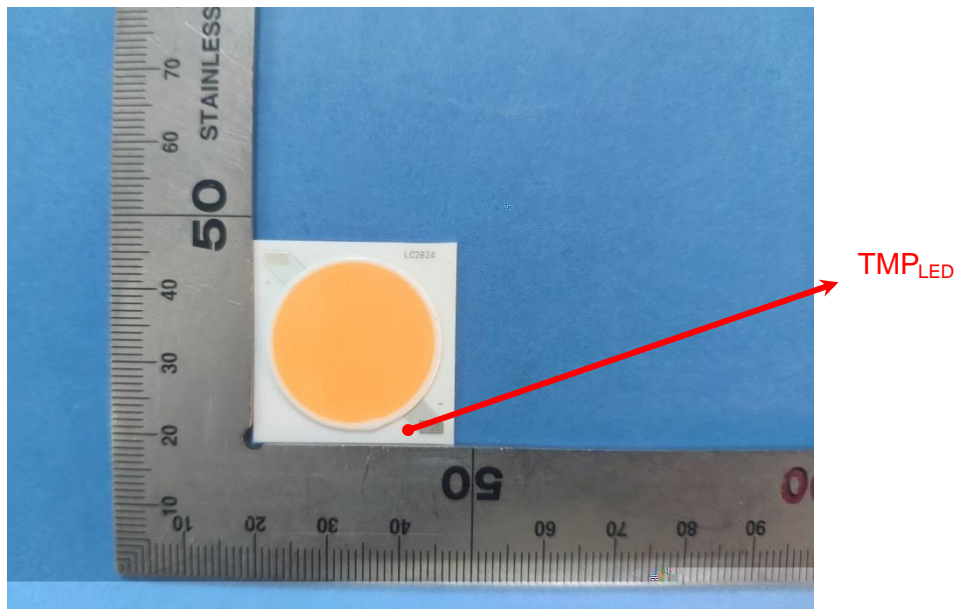



Bay Area Compliance Laboratories Corp.(Shenzhen
5/F(B-West)-7/F, the 3rd Phase of Wan Li Indust
Building D, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong
The NVLAP Lab Code is 200760

Directions

*****END OF REPORT*****